

# Tube test data for Hickock

**532**

**533**

**534**

**600**

## series Tube tester



Reworked by  
PAØPGA

This manual was downloaded from BAMA's  
boatanchor site <http://bama.sbc.edu>



# Model 532-533-533DM-534

Code No. 3200-44

# STOP

COPYRIGHT 1961

THE HICKOK ELECTRICAL INSTRUMENT COMPANY—CLEVELAND, OHIO

Model	Tube	Scale	Range	Unit	Notes
0A4G	OFF KS-0581-0	100	85	P5*	
0Y4	BLST JX-3502-0	0	40	P2*	
0Z4	JR-0507-0	0	75	P2*	Short-circuit 1-2 Hold button down for 5 seconds. Plate No. 1
0Z4	JR-0307-0	0	75	P2*	Hold button down for 5 seconds. Plate No. 2
1A3	1.5 HT-0201-0	0	0	P1*	
1A5	1.5 JR-5340-0	43	39	P4	
1A7G	1.5 JR-5340-0	30	73	P4	
1A7G	1.5 JR-5843-0	46	73	P4	
1A05	1.1 EV-2780-0	44	0	P4	
1AD4	1.1 DV-4120-0	28	62	P4	
1AD5	1.1 EV-3780-0	28	16	P4	
1AE4	1.1 DX-6210-0	22	47	P4	
1AF4	1.5 DX-6210-0	21	27	P4	
1AF5	1.5 DX-6580-0	16	15	P4	
1AF5	1.5 DX-0100-0	0	0	P1*	
1AG4	1.1 DV-4120-0	54	20	P4	
1AG5	1.1 EW-5120-3	40	0	P5*	
1AG5	1.1 EW-0300-0	0	0	P1*	
1AH4	1.1 FT-4120-0	33	0	P5*	
1AJ5	1.1 EW-5120-3	37	73	P4	
1AJ5	1.1 EW-0300-0	0	0	P1*	
1AK4	1.1 FT-4120-0	33	0	P5*	
1AK5	1.1 EW-5120-3	40	0	P5*	
1AK5	1.1 EW-0300-0	0	0	P1*	
1AU3	1.1 JR-0000-0	0	0	P5*	
1AX2	1.5 BS-0000-0	0	15	P5*	
1B3/8016	1.1 JR-0000-0	0	60	P5*	
1B4	2.0 JR-0230-0	35	22	P4	
1C3	1.5 DX-8200-0	37	33	P4	
1C5	1.5 JR-5340-0	44	67	P4	
1C21	BLST JP-8501-0	0	83	P5*	
1D5	2.0 JR-0340-0	29	33	P4	
1DN5	1.5 DX-6210-0	32	15	P4	
1DN5	1.5 HT-0800-0	0	0	P1*	
1E3	1.1 EV-1800-0	24	81	P4	
1G3	1.1 JR-0000-0	0	60	P5*	
1H2	1.4 BS-0000-0	0	60	P5*	
1H5	1.5 JR-0300-0	16	73	P4	
1H5	1.5 JR-0800-0	16	0	P1*	
1H6	2.0 JR-6300-0	28	73	P4	

# 534A-534B-600 Tube Tester

3-1-61

# STOP

NOTE: A Star \* after P1, P2, P3, and P5 indicates that reading is made on English Scale only.

NOTE: A crosshatch in the BIAS column indicates Bias should be set at 100 and proper button pressed while Bias Dial is rotated until tube strikes.

Model	Tube	Scale	Range	Unit	Notes
12A8	12.5 JR-0347-5	22	50	P4	
12A8	12.6 JR-5647-3	37	73	P4	
12AB5	12.6 EV-3917-0	21	85	P4	
12AC6	12.6 JR-2657-3	30	0	P1*	
12AD6	12.6 JR-7652-3	30	0	P1*	
12AD7	12.6 EV-7608-0	12	58	P4	
12AD7	12.6 EV-2103-0	12	58	P4	
12AE6	12.6 JR-0702-3	0	0	P1*	
12AE6	12.6 JR-0602-0	0	0	P1*	
12AE6	12.6 JR-0602-0	0	0	P1*	
12AE7	12.6 EV-0608-7	0	30	P1*	
12AE7	12.6 EV-0103-2	0	40	P1*	
12AF3	12.6 EV-0002-0	0	65	P3*	
12AF6	12.6 JR-3667-2	41	55	P4	
12AG6	12.6 JR-7652-3	30	30	P1*	
12AH7	12.6 JX-5604-3	20	73	P4	
12AH7	12.6 JX-2301-6	20	73	P4	
12AJ6	12.6 JR-0702-3	0	0	P1*	
12AJ6	12.6 JR-0602-0	0	0	P1*	
12AJ6	12.6 JR-0502-0	0	0	P1*	
12AL5	12.6 JR-0703-0	0	61	P1*	
12AL5	12.6 JR-0205-0	0	61	P1*	
12AL8	12.6 EV-0367-2	0	57	P1*	
12AL8	12.6 EV-0109-8	0	0	P1*	
12AQ5	12.6 JR-3562-0	21	85	P4	
12AS5	12.6 JR-2763-0	26	89	P4	
12AT6	12.6 JR-3702-0	11	56	P4	
12AT6	12.6 JR-3602-0	11	0	P1*	
12AT6	12.6 JR-3502-0	11	0	P1*	
12AT7	12.6 EV-7608-0	10	86	P4	
12AT7	12.6 EV-2103-0	16	76	P4	
12AU6	12.6 JR-3567-2	16	76	P4	
12AU7	12.6 EV-2103-0	24	75	P4	
12AU7	12.6 EV-2103-0	24	76	P4	
12AV5	12.6 JR-2573-0	50	86	P4	
12AV6	12.6 JR-3702-6	12	58	P4	
12AV6	12.6 JR-3602-5	0	0	P1*	
12AV6	12.6 JR-3502-6	0	0	P1*	
12AV7	12.6 EV-2103-7	30	69	P4	
12AV7	12.6 EV-7608-2	30	69	P4	
12AV8	12.6 JR-3562-7	0	82	P4	
12AV8	12.6 JR-3562-7	0	82	P4	





Part No.	Part Description	QTY	Notes	Part No.	Part Description	QTY	Notes
1H5	1.5 JR-0500-0	16	0	12AV7	12.6 EV-7608-2	30	69
1H6	2.0 JR-6300-0	28	73	12AW6	12.6 JR-3562-7	0	82
1H6	2.0 JR-6500-0	28	0	12AX4	12.6 JX-0503-0	0	60
1H6	2.0 JR-6400-0	28	0	12AX7	12.6 EV-7608-0	12	58
1J3	1.1 JR-0000-0	0	0	12AY7	12.6 EV-2103-0	15	58
1K3	1.1 JR-0000-0	0	0	12AY7	12.6 EV-7608-0	10	86
1L4	1.5 HT-6210-0	19	92	12AZ7	12.6 EV-2103-0	10	86
1L6	1.5 DX-6251-8	18	39	12B4	12.6 EV-2901-0	52	90
1LA4	1.5 JR-6230-0	43	39	12B7	12.6 EV-2901-0	22	72
1LA6	1.5 JR-6253-4	24	39	12BA6	12.6 JR-3567-2	9	83
1LA6	1.5 JR-4352-6	46	73	12BA7	12.6 EV-7913-2	17	31
1LB4	1.5 JR-6230-0	51	44	12BD6	12.6 JR-3567-2	18	73
1LB6	1.5 JR-6243-7	0	0	12BE6	12.6 JR-3562-3	11	63
1LB6	1.5 JR-6357-4	20	65	12BE6	12.6 JR-3562-7	0	67
1LC5	1.5 JR-6234-0	29	37	12BF6	12.6 JR-3702-0	14	72
1LC6	1.5 JR-6253-4	30	25	12BF6	12.6 JR-3602-0	0	0
1LC6	1.5 JR-4352-6	30	73	12BF6	12.6 JR-3602-0	0	0
1LD5	1.5 JR-6230-0	28	17	12BH7	12.6 EV-7608-2	29	78
1LD6	1.5 JR-6430-0	28	0	12BK5	12.6 EV-2103-7	29	78
1LE3	1.5 JR-6205-0	0	61	12BK5	12.6 EV-3186-0	6	58
1LF3	1.5 JR-6205-0	20	87	12BK6	12.6 JR-0602-5	0	49
1LG5	1.5 JR-6234-0	25	58	12BK6	12.6 JR-0502-7	0	49
1LH4	1.5 JR-6200-0	16	73	12BL6	12.6 JR-2657-3	30	0
1LH4	1.5 JR-6400-0	16	0	12BN6	12.6 JR-2763-6	0	28
1LN5	1.5 JR-6234-0	11	34	12BN6	12.6 JR-6763-2	0	43
1N2	1.1 JR-0000-0	0	60	12BQ6	12.6 JR-5047-0	50	87
1N5	1.5 JR-0340-0	11	34	12BR7	12.6 EV-2103-0	10	86
1Q5	1.5 JR-5340-0	37	74	12BR7	12.6 EV-0708-0	0	56
1Q6	1.1 EV-2780-0	36	73	12BR7	12.6 EV-0608-0	0	56
1Q6	1.1 EV-0600-0	0	0	12BT6	12.6 JR-3702-0	13	60
1R5	1.5 DX-8106-2	60	42	12BT6	12.6 JR-3602-0	0	0
1S2A	1.5 ES-0000-0	0	72	12BU6	12.6 JR-3702-0	34	65
184	1.5 DX-1280-0	43	65	12BU6	12.6 JR-3602-0	0	0
185	1.5 DX-6580-0	34	11	12BV7	12.6 EV-2781-3	13	90
185	1.5 DX-0180-0	34	0	12BW4	12.6 EV-0709-1	0	20
1S6	1.1 EV-3180-0	35	73	12BY7	12.6 EV-0109-7	0	20
1S6	1.1 EV-0600-0	0	0	12BZ6	12.6 EV-2781-3	13	90
1T4	1.5 DX-6210-0	34	34	12BZ7	12.6 JR-3562-7	20	78
1T6	1.1 EV-3186-0	23	73	12BZ7	12.6 EV-7608-0	24	48
1T6	1.1 EV-0600-0	0	0	12C5	12.6 EV-2103-0	23	91
1U4	1.5 DX-6210-0	14	43	12C8	12.6 JR-0367-2	24	55
1U5	1.5 DX-6210-0	34	11	12C8	12.6 JR-0507-3	24	0
1U5	1.5 DX-6810-0	34	0	12C8	12.6 JR-0407-3	24	0
1U6	1.5 DX-6251-8	25	48	12CA5	12.6 JR-2763-0	24	90
1U6	1.5 DX-8156-2	5	0	12CM6	12.6 EV-3917-0	21	85
1V	8.3 JR-0203-0	0	49	12CN5	12.6 JR-0673-2	0	0
1V2	0.6 EV-0900-0	0	12	12CR6	12.6 JR-7563-2	11	74
1V5	1.1 EV-2780-0	44	0	12CR6	12.6 JR-0203-0	0	0
1V6	1.1 EX-3120-6	29	0	12CS6	12.6 JR-7562-3	Use this setting for short	
1V6	1.1 EX-5600-1	50	0	12CT8	12.6 EV-8679-0	43	35
1W4	1.5 DX-6210-0	49	45	12CT8	12.6 EV-2103-0	22	78
1W5	1.1 EV-2780-0	33	73	12CU5	12.6 JR-2763-0	37	88
1Yn	1.1 EV-2780-0	33	73	12CU6	12.6 JR-5047-0	50	87

Diode Sect.  
Triode Section  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Diode No. 1  
EX OVER 20 ON 100 SCALE

Diode No. 2  
EX OVER 20 ON 100 SCALE

Pent. Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Triode Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Osc. Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Diode Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Osc. Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Diode Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Triode Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Pent. Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Diode Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Cap-P  
EX ABOVE SUCCESS OR  
EX OVER 20 ON 100 SCALE

Cap-G  
EX ABOVE SUCCESS OR  
EX OVER 20 ON 100 SCALE

Cap-P  
EX ABOVE SUCCESS OR  
EX OVER 20 ON 100 SCALE

Pent. Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Diode Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Plate No. 1  
EX OVER 20 ON 100 SCALE

Plate No. 2  
EX OVER 20 ON 100 SCALE

Triode No. 1  
EX OVER 20 ON 100 SCALE

Triode No. 2  
EX OVER 20 ON 100 SCALE

Pent. Sect. Cap-G  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Diode No. 1  
EX OVER 20 ON 100 SCALE

Diode No. 2  
EX OVER 20 ON 100 SCALE

Make no gas test  
Pent. Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Diode Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Make no gas test  
Pent. Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Triode Sect.  
HEPTODES ONLY  
EX OVER 20 ON 100 SCALE

Triode No. 1  
EX OVER 20 ON 100 SCALE

Triode No. 2  
EX OVER 20 ON 100 SCALE

Cap-P  
EX ABOVE SUCCESS OR  
EX OVER 20 ON 100 SCALE



Reworked by  
PAØPGA

This manual was downloaded from BAMA's  
boatanchor site <http://bama.sbc.edu>





Part No.	Description	QTY	Unit	Material	Notes
1W4	Cap-P	49	P4	1.5 DX-6210-0	OK OVER DIMS ON THE SCALE
1W5	Cap-P	33	P4	1.1 EV-2780-0	OK OVER DIMS ON THE SCALE
1X2	Cap-P	0	P5*	1.1 BS-0000-0	OK OVER DIMS ON THE SCALE
1Z2	Cap-P	0	P5*	1.5 DS-0000-0	OK OVER DIMS ON THE SCALE
2A3	Cap-P	67	P4	2.5 JR-3200-0	OK OVER DIMS ON THE SCALE
2AF4	Cap-P	41	P4	2.5 JR-2305-0	OK OVER DIMS ON THE SCALE
2B3	Diode No. 1	0	P5*	1.5 JR-0000-0	OK OVER DIMS ON THE SCALE
2B7	Diode No. 1	30	P4	2.5 JR-0236-0	OK OVER DIMS ON THE SCALE
2B7	Diode No. 1	30	P1*	2.5 JR-0536-0	OK OVER DIMS ON THE SCALE
2B7	Diode No. 1	30	P1*	2.5 JR-0436-0	OK OVER DIMS ON THE SCALE
2B23	Diode No. 1	0	P2*	6.3 JR-0307-0	OK OVER DIMS ON THE SCALE
2BNA	Diode No. 2	18	P4	2.0 JR-2503-0	OK OVER DIMS ON THE SCALE
2BNA	Diode No. 2	26	P4	2.0 JR-2503-0	OK OVER DIMS ON THE SCALE
2C21	Diode No. 1	38	P4	6.3 JR-4506-0	OK OVER DIMS ON THE SCALE
2C21	Diode No. 1	62	P4	6.3 JR-0302-0	OK OVER DIMS ON THE SCALE
2C46	Diode No. 1	37	P4	7.5 JR-3200-0	OK OVER DIMS ON THE SCALE
2C50	Diode No. 1	41	P4	12.6 JX-2103-0	OK OVER DIMS ON THE SCALE
2C50	Diode No. 1	41	P4	12.6 JX-1606-0	OK OVER DIMS ON THE SCALE
2C51	Diode No. 1	13	P4	6.3 KR-7608-2	OK OVER DIMS ON THE SCALE
2C51	Diode No. 1	13	P4	6.3 KR-3402-8	OK OVER DIMS ON THE SCALE
2C62	Diode No. 1	15	P4	12.6 JX-4506-1	OK OVER DIMS ON THE SCALE
2C62	Diode No. 1	15	P4	12.6 JX-2103-5	OK OVER DIMS ON THE SCALE
2C63	Diode No. 1	0	P4	6.3 JR-5007-0	OK OVER DIMS ON THE SCALE
2CW4	Diode No. 1	29	P4	2.0 DS-4107-0	OK OVER DIMS ON THE SCALE
2CY5	Diode No. 1	23	P4	2.5 JR-3562-0	OK OVER DIMS ON THE SCALE
2D21	Diode No. 1	0	P5*	6.3 JR-3602-5	OK OVER DIMS ON THE SCALE
2E22	Diode No. 1	0	P4	6.3 JR-3024-0	OK OVER DIMS ON THE SCALE
2E24	Diode No. 1	35	P4	6.3 JR-5030-0	OK OVER DIMS ON THE SCALE
2E25	Diode No. 1	0	P4	6.3 JR-6040-7	OK OVER DIMS ON THE SCALE
2E26	Diode No. 1	37	P4	6.3 JR-5032-7	OK OVER DIMS ON THE SCALE
2E30	Diode No. 1	20	P4	6.3 JR-3562-2	OK OVER DIMS ON THE SCALE
2E31	Diode No. 1	41	P4	1.1 DV-4120-0	OK OVER DIMS ON THE SCALE
2E32	Diode No. 1	41	P4	1.1 DV-4120-0	OK OVER DIMS ON THE SCALE
2E35	Diode No. 1	40	P4	1.1 DV-4120-0	OK OVER DIMS ON THE SCALE
2E36	Diode No. 1	40	P4	1.1 DV-4120-0	OK OVER DIMS ON THE SCALE
2E41	Diode No. 1	45	P4	1.1 EW-5120-0	OK OVER DIMS ON THE SCALE
2E41	Diode No. 1	0	P1*	1.1 EW-0300-0	OK OVER DIMS ON THE SCALE
2E42	Diode No. 1	45	P4	1.1 EW-5120-0	OK OVER DIMS ON THE SCALE
2E42	Diode No. 1	0	P1*	1.1 EW-0300-0	OK OVER DIMS ON THE SCALE
2EA5	Diode No. 1	13	P4	2.5 JR-3562-0	OK OVER DIMS ON THE SCALE
2EN5	Diode No. 1	0	P5*	2.0 JR-0705-6	OK OVER DIMS ON THE SCALE
2EN5	Diode No. 1	0	P1*	2.0 JR-0205-6	OK OVER DIMS ON THE SCALE
2ER5	Diode No. 1	20	P4	2.0 JR-2567-0	OK OVER DIMS ON THE SCALE
2ES5	Diode No. 1	10	P4	2.5 JR-2503-0	OK OVER DIMS ON THE SCALE
2EV5	Diode No. 1	18	P4	2.5 JR-3562-0	OK OVER DIMS ON THE SCALE
2FH5	Diode No. 1	15	P4	2.5 JR-2507-0	OK OVER DIMS ON THE SCALE
2FQ5	Diode No. 1	27	P4	2.5 JR-2507-0	OK OVER DIMS ON THE SCALE
2G21	Diode No. 1	46	P5*	1.1 EX-3265-1	OK OVER DIMS ON THE SCALE
2G21	Diode No. 1	44	P5*	1.1 EX-3100-0	OK OVER DIMS ON THE SCALE
2G22	Diode No. 1	44	P5*	1.1 EX-3265-1	OK OVER DIMS ON THE SCALE
2G22	Diode No. 1	44	P5*	1.1 EX-3100-0	OK OVER DIMS ON THE SCALE
2T4	Diode No. 1	40	P4	2.5 JR-2305-0	OK OVER DIMS ON THE SCALE
2V2	Diode No. 1	0	P6*	2.5 JR-0005-0	OK OVER DIMS ON THE SCALE
2X2A	Diode No. 1	0	P7*	2.5 JR-0000-0	OK OVER DIMS ON THE SCALE
3A2	Diode No. 1	0	P5*	3.0 BS-0000-0	OK OVER DIMS ON THE SCALE
3A3	Diode No. 1	0	P5*	3.0 JR-0000-0	OK OVER DIMS ON THE SCALE
3A4	Diode No. 1	33	P4	2.5 DX-8210-0	OK OVER DIMS ON THE SCALE
3A5	Diode No. 1	32	P4	3.0 DX-5600-0	OK OVER DIMS ON THE SCALE
925	Cap-P	49	P4	1.5 DX-6210-0	OK OVER DIMS ON THE SCALE
3000	Cap-P	67	P4	2.5 JR-3200-0	OK OVER DIMS ON THE SCALE
3000	Cap-P	41	P4	2.5 JR-2305-0	OK OVER DIMS ON THE SCALE
1000	Cap-P	30	P4	2.5 JR-0236-0	OK OVER DIMS ON THE SCALE
4000	Cap-P	30	P4	2.5 JR-0536-0	OK OVER DIMS ON THE SCALE
3400	Cap-P	30	P4	2.5 JR-0436-0	OK OVER DIMS ON THE SCALE
1376	Cap-P	38	P4	6.3 JR-4506-0	OK OVER DIMS ON THE SCALE
1376	Cap-P	62	P4	6.3 JR-0302-0	OK OVER DIMS ON THE SCALE
2200	Cap-P	37	P4	7.5 JR-3200-0	OK OVER DIMS ON THE SCALE
1800	Cap-P	41	P4	12.6 JX-2103-0	OK OVER DIMS ON THE SCALE
1800	Cap-P	41	P4	12.6 JX-1606-0	OK OVER DIMS ON THE SCALE
5380	Cap-P	13	P4	6.3 KR-7608-2	OK OVER DIMS ON THE SCALE
1000	Cap-P	15	P4	12.6 JX-4506-1	OK OVER DIMS ON THE SCALE
1000	Cap-P	15	P4	12.6 JX-2103-5	OK OVER DIMS ON THE SCALE
400	Cap-P	0	P4	6.3 JR-5007-0	OK OVER DIMS ON THE SCALE
1700	Cap-P	29	P4	2.0 DS-4107-0	OK OVER DIMS ON THE SCALE
3000	Cap-P	23	P4	2.5 JR-3562-0	OK OVER DIMS ON THE SCALE
4000	Cap-P	0	P5*	6.3 JR-3602-5	OK OVER DIMS ON THE SCALE
3200	Cap-P	35	P4	6.3 JR-5030-0	OK OVER DIMS ON THE SCALE
3000	Cap-P	0	P4	6.3 JR-6040-7	OK OVER DIMS ON THE SCALE
3500	Cap-P	37	P4	6.3 JR-5032-7	OK OVER DIMS ON THE SCALE
3000	Cap-P	20	P4	6.3 JR-3562-2	OK OVER DIMS ON THE SCALE
500	Cap-P	41	P4	1.1 DV-4120-0	OK OVER DIMS ON THE SCALE
500	Cap-P	41	P4	1.1 DV-4120-0	OK OVER DIMS ON THE SCALE
375	Cap-P	40	P4	1.1 DV-4120-0	OK OVER DIMS ON THE SCALE
375	Cap-P	40	P4	1.1 DV-4120-0	OK OVER DIMS ON THE SCALE
4000	Cap-P	45	P4	1.1 EW-5120-0	OK OVER DIMS ON THE SCALE
4000	Cap-P	0	P1*	1.1 EW-0300-0	OK OVER DIMS ON THE SCALE
3400	Cap-P	45	P4	1.1 EW-5120-0	OK OVER DIMS ON THE SCALE
4200	Cap-P	10	P4	2.5 JR-2567-0	OK OVER DIMS ON THE SCALE
4600	Cap-P	18	P4	2.5 JR-3562-0	OK OVER DIMS ON THE SCALE
4800	Cap-P	15	P4	2.5 JR-2507-0	OK OVER DIMS ON THE SCALE
2500	Cap-P	27	P4	2.5 JR-2507-0	OK OVER DIMS ON THE SCALE
4000	Cap-P	46	P5*	1.1 EX-3265-1	OK OVER DIMS ON THE SCALE
4000	Cap-P	44	P5*	1.1 EX-3100-0	OK OVER DIMS ON THE SCALE
4000	Cap-P	40	P4	2.5 JR-2305-0	OK OVER DIMS ON THE SCALE
2000	Cap-P	0	P6*	2.5 JR-0005-0	OK OVER DIMS ON THE SCALE
2000	Cap-P	0	P5*	3.0 BS-0000-0	OK OVER DIMS ON THE SCALE
2000	Cap-P	33	P4	2.5 DX-8210-0	OK OVER DIMS ON THE SCALE
2000	Cap-P	32	P4	3.0 DX-5600-0	OK OVER DIMS ON THE SCALE















Reworked by  
PAØPGA

This manual was downloaded from BAMA's  
boatanchor site <http://bama.sbc.edu>



5B8	5.0 EV-2301-9	23	83	P4	3300	Triode Sect.
5B8B	5.0 EV-9678-3	15	76	P4	2250	pent. sect. (pent. sect. 88 13)
5B8C	5.0 EV-1203-0	16	87	P4	4500	Triode Sect.
5BK7A	5.0 EV-7608-9	22	85	P4	4000	Triode No. 1
5BK7A	5.0 EV-2103-9	22	85	P4	4000	Triode No. 2
5B07A	5.0 EV-7608-9	13	88	P4	5300	Triode No. 1
5B07A	5.0 EV-2103-9	13	88	P4	5300	Triode No. 2
5BR8	5.0 EV-9678-0	15	76	P4	2250	Pent. Sect.
5BR8	5.0 EV-1203-0	16	87	P4	4500	Triode Sect.
5BR8	5.0 EV-7608-9	20	86	P4	4000	Triode No. 1
5BR8	5.0 EV-2103-9	20	86	P4	4000	Triode No. 2
5BT8	5.0 EV-8679-0	22	75	P4	2200	Pent. Sect.
5BT8	5.0 EV-0103-0	0	30	P1*	-----	Diode No. 1
5BT8	5.0 EV-0203-0	0	30	P1*	-----	Diode No. 2
5BW8	5.0 EV-6987-0	15	76	P4	2250	Pent. Sect.
5BW8	5.0 EV-0302-0	0	50	P1*	-----	Diode No. 1
5BW8	5.0 EV-0102-0	0	50	P1*	-----	Diode No. 2
5BZ7	5.0 EV-7608-9	18	88	P4	5000	Triode No. 1
5BZ7	5.0 EV-2103-9	18	88	P4	5000	Triode No. 2
5CG8	5.0 EV-1203-0	20	81	P4	3000	Pent. Sect.
5CL8	5.0 EV-9678-0	12	81	P4	3000	Triode Sect.
5CL8	5.0 EV-1203-0	12	87	P4	4500	Tetrode Sect.
5CM6	5.0 EV-3917-0	21	85	P4	3700	Triode Sect.
5CM8	5.0 EV-2673-0	22	75	P4	2200	Pent. Sect.
5CM8	5.0 EV-9108-0	16	48	P4	1000	Triode Sect.
5CO8	5.0 EV-2637-0	16	80	P4	2800	Tetrode Sect.
5CO8	5.0 EV-9108-0	23	83	P4	3400	Triode Sect.
5CU4	5.0 HR-0602-0	0	70	P3*	-----	Plate No. 1
5CU4	5.0 HR-0402-0	0	70	P3*	-----	Plate No. 2
5CZ5	5.0 EV-3917-0	12	88	P4	4800	Pent. Sect.
5DH8	5.0 EV-9678-0	20	83	P4	3300	Triode Sect.
5DH8	5.0 EV-1203-0	25	67	P4	1600	Pent. Sect.
5E8	5.0 EV-2637-0	19	78	P4	2500	Pent. Sect.
5E8	5.0 EV-9108-0	19	85	P4	3800	Triode Sect.
5E8	5.0 EV-7986-0	20	75	P4	2300	Pent. Sect.
5EH8	5.0 EV-2301-0	22	86	P4	4100	Triode Sect.
5ES8	5.0 EV-7608-0	28	89	P4	5500	Triode No. 1
5ES8	5.0 EV-2103-0	28	89	P4	5500	Triode No. 2
5EU8	5.0 EV-7198-0	19	78	P4	2500	Pent. Sect.
5EU8	5.0 EV-2306-0	19	85	P4	3800	Triode Sect.
5EW6	5.0 JR-3562-7	23	72	P4	2100	Pent. Sect.
5FG7	5.0 EV-9678-0	17	83	P4	2900	Triode Sect.
5FG7	5.0 EV-1203-0	25	84	P4	3100	Triode Sect.
5FV8	5.0 EV-9678-0	17	79	P4	2700	Pent. Sect.
5FV8	5.0 EV-1203-0	23	86	P4	4250	Triode Sect.
5GH8	5.0 EV-2637-0	13	85	P4	4000	Pent. Sect.
5GH8	5.0 EV-9108-0	12	89	P4	5500	Triode Sect.
5J6	5.0 JR-5207-0	20	81	P4	3000	Triode No. 1
5J6	5.0 JR-6307-0	20	81	P4	3000	Triode No. 2
5R4	5.0 HR-0600-0	0	24	P3*	-----	Plate No. 1
5R4	5.0 HR-0400-0	0	18	P3*	-----	Plate No. 2
5T4	5.0 HR-0600-0	0	55	P3*	-----	Plate No. 1
5T4	5.0 HR-0400-0	0	49	P3*	-----	Plate No. 2
5T8	5.0 EV-8907-6	11	56	P4	1200	Triode Sect.
5T8	5.0 EV-0607-1	0	50	P1*	-----	Diode No. 1
5T8	5.0 EV-0203-7	0	50	P1*	-----	Diode No. 2
5T8	5.0 EV-0107-8	0	50	P1*	-----	Diode No. 3
5U4	5.0 HR-0600-0	0	35	P3*	-----	Plate No. 1
5U4	5.0 HR-0400-0	0	30	P3*	-----	Plate No. 2
5UB	5.0 EV-2667-0	15	76	P4	2250	Pent. Sect.
14E6	12.6 JR-3207-0	12	71	P4	1800	Triode Sect.
14E6	12.6 JR-0807-2	12	0	P1*	-----	Diode No. 1
14E6	12.6 JR-0507-2	12	0	P1*	-----	Diode No. 2
14F7	12.6 JR-5607-3	0	68	P4	1600	Triode No. 1
14F7	12.6 JR-4302-6	0	68	P4	1600	Triode No. 2
14F8	12.6 HS-8605-0	10	86	P4	4000	Triode No. 1
14F8	12.6 HS-1304-0	10	86	P4	4000	Triode No. 2
14GT8	12.6 EV-8907-0	10	7	P4	550	Triode Sect.
14GT8	12.6 EV-0601-0	0	58	P1*	-----	Diode No. 1
14GT8	12.6 EV-0203-0	0	58	P1*	-----	Diode No. 2
14H7	12.6 JR-6237-4	10	82	P4	3000	Triode Sect.
14J7	12.6 JR-6257-4	18	38	P4	800	Osc. Sect.
14J7	12.6 JR-4357-6	18	51	P4	1000	Triode Sect.
14N7	12.6 JR-5607-3	23	73	P4	2000	Triode No. 1
14N7	12.6 JR-4302-6	23	73	P4	2000	Triode No. 2
14O7	12.6 JR-6237-4	21	0	P4	500	Pent. Sect.
14O7	12.6 JR-4237-8	21	40	P4	800	Osc. Sect.
14R7	12.6 JR-6257-0	10	82	P4	3000	Pent. Sect.
14R7	12.6 JR-0407-2	10	0	P1*	-----	Diode No. 1
14R7	12.6 JR-0307-2	10	0	P1*	-----	Diode No. 2
14S7	12.6 JR-6207-4	18	65	P4	1500	Heptode Sect.
14S7	12.6 JR-4357-6	0	65	P4	4000	Triode Sect.
14V7	12.6 JR-6237-4	6	86	P4	4000	Triode Sect.
14W7	12.6 JR-6237-5	11	82	P4	3000	Triode Section
14X7	12.6 JR-3204-0	0	37	P4	900	Diode No. 1
14X7	12.6 JR-0504-0	0	61	P1*	-----	Diode No. 2
14X7	12.6 JR-0607-0	0	61	P1*	-----	Plate No. 1
14Y4	12.6 JR-0807-0	0	33	P3*	-----	Plate No. 2
14Y4	12.6 EV-2713-6	11	91	P4	7500	MADE "LINE TEST" AT 100 OH
15A6	12.6 EV-3562-7	22	82	P4	3000	MADE "LINE TEST" AT 100 OH
15EW6	12.6 JR-3562-7	22	82	P4	3000	MADE "LINE TEST" AT 100 OH
17A5	20.0 JR-2573-0	30	89	P4	5500	MADE "LINE TEST" AT 100 OH
17AX4	20.0 JX-0503-0	0	60	P3*	-----	MADE "LINE TEST" AT 100 OH
17BQ6	20.0 JR-5047-0	50	87	P4	4500	MADE "LINE TEST" AT 100 OH
17C5	20.0 JR-2763-0	23	90	P4	6000	MADE "LINE TEST" AT 100 OH
17CA5	20.0 JR-2763-0	20	88	P4	5000	MADE "LINE TEST" AT 100 OH
17D4	20.0 JX-0503-0	0	58	P3*	-----	MADE "LINE TEST" AT 100 OH
17DE4	20.0 JX-0503-0	0	67	P3*	-----	MADE "LINE TEST" AT 100 OH
17DQ6	20.0 JR-5047-0	32	90	P4	6000	MADE "LINE TEST" AT 100 OH
17H3	20.0 EV-0301-0	0	40	P3*	-----	MADE "LINE TEST" AT 100 OH
17L6	20.0 JR-5347-0	30	88	P4	5000	MADE "LINE TEST" AT 100 OH
17R5	20.0 JR-2763-0	23	88	P4	5000	MADE "LINE TEST" AT 100 OH
18A5	20.0 JR-2573-0	40	88	P4	4800	MADE "LINE TEST" AT 100 OH
18DZ8	20.0 EV-3572-0	29	89	P4	5500	MADE "LINE TEST" AT 100 OH
18DZ8	20.0 EV-1908-0	25	0	P4	500	MADE "LINE TEST" AT 100 OH
18FW6	20.0 JR-3567-2	23	68	P4	1800	MADE "LINE TEST" AT 100 OH
18FX6	20.0 JR-3562-7	22	43	P4	1000	MADE "LINE TEST" AT 100 OH
18FX6	20.0 JR-3602-7	22	87	P4	4400	MADE "LINE TEST" AT 100 OH
18FY6	20.0 JR-3702-0	28	0	P4	-----	MADE "LINE TEST" AT 100 OH
18FY6	20.0 JR-0602-0	0	0	P1*	-----	MADE "LINE TEST" AT 100 OH
18FY6	20.0 JR-0502-0	0	0	P1*	-----	MADE "LINE TEST" AT 100 OH
18HB8	20.0 EV-9768-0	24	77	P4	2400	MADE "LINE TEST" AT 100 OH
18HB8	20.0 EV-1302-0	26	46	P4	960	MADE "LINE TEST" AT 100 OH
19AQ5	20.0 JR-3562-0	21	85	P4	3700	MADE "LINE TEST" AT 100 OH
19AU4	20.0 JX-0503-0	0	72	P3*	-----	MADE "LINE TEST" AT 100 OH
19BG6	20.0 JR-5073-0	24	89	P4	6000	MADE "LINE TEST" AT 100 OH



Part No.	Part Description	Quantity	Material	Notes	Cap = P
6U8	5.0 EV-2637-0	15	P4	Pent. Sect.	6000
6U8	5.0 EV-9108-0	16	P4	Triode Sect.	500
6V3	6.3 HR-0600-4	0	P3*	Plate No. 1	Diode No. 1
6V3	6.3 HR-0400-6	0	P3*	Plate No. 2	Diode No. 2
6V4	5.0 HR-0600-0	0	P3*	Plate No. 1	Diode No. 3
6V4	5.0 HR-0400-0	0	P3*	Plate No. 2	Triode Sect.
6W4	5.0 JR-5347-0	21	P4	Triode Sect.	3000
6W4	5.0 HR-0600-0	0	P3*	Plate No. 1	Triode Sect.
6W4	5.0 HR-0400-0	0	P3*	Plate No. 2	Triode Sect.
6X4	5.0 JX-0500-0	0	P3*	Plate No. 1	Pentode Sect.
6X4	5.0 JX-0300-0	0	P3*	Plate No. 2	Triode Sect.
6X8	5.0 EV-7986-1	10	P4	Pent. Sect.	2560
6X8	5.0 EV-2386-1	20	P4	Triode Sect.	2500
6Y3	5.0 HR-0600-0	0	P3*	Plate No. 1	Triode Section
6Y3	5.0 HR-0400-0	0	P3*	Plate No. 2	
6Y4	5.0 JX-0500-0	0	P3*	Plate No. 1	Diode No. 1
6Y4	5.0 JX-0300-0	0	P3*	Plate No. 2	Diode No. 2
6Z3	5.0 JR-0300-0	0	P3*	Plate No. 1	Diode No. 3
6Z4	5.0 JR-0200-0	0	P3*	Plate No. 2	Triode Sect.
6Z4	5.0 HR-0600-0	0	P3*	Plate No. 1	Diode No. 1
6A3	6.3 JR-3200-0	67	P4	Diode No. 2	Diode No. 2
6A3	6.3 JR-3000-0	67	P4	Diode No. 3	Diode No. 3
6A5	6.3 JR-5604-0	12	P4	Pent. Sect.	3000
6A6	6.3 JR-3204-0	12	P4	Triode Sect.	3000
6A6	6.3 JR-0236-5	22	P4	Triode Sect.	3000
6A7	6.3 JR-6436-2	30	P4	Pent. Sect.	3000
6A7	6.3 JR-0347-5	22	P4	Triode Sect.	1050
6A8	6.3 JR-5647-3	30	P4	Pent. Sect.	1050
6A8	6.3 JR-6307-0	10	P4	Triode Sect.	1250
6AB4	6.3 EV-4765-3	0	P4	Triode No. 1	Triode No. 1
6AB7/1803	6.3 EV-9683-7	24	P4	Triode No. 2	Triode No. 2
6AB8	6.3 EV-2103-0	35	P4	Triode No. 3	Triode No. 3
6AC5	6.3 JR-5307-0	0	P4	Triode No. 1	Triode No. 1
6AC7/1852	6.3 JR-4765-3	10	P4	Triode No. 2	Triode No. 2
6AD4	6.3 DW-1805-0	27	P4	Triode No. 3	Triode No. 3
6AD7	6.3 JR-5347-6	29	P4	Triode No. 1	Triode No. 1
6AD7	6.3 JR-2607-3	0	P4	Triode No. 2	Triode No. 2
6AF3	6.3 EV-0002-0	0	P3*	Triode No. 3	Triode No. 3
6AF4	6.3 JR-2305-0	41	P4	Triode No. 1	Triode No. 1
6AF6	6.3 JR-4357-0	---	P4	Triode No. 2	Triode No. 2
6AF6	6.3 JR-3457-0	---	P4	Triode No. 3	Triode No. 3
6AG5	6.3 JR-3562-0	0	P4	Triode No. 1	Triode No. 1
6AG7	6.3 JR-4765-2	18	P4	Triode No. 2	Triode No. 2
6AH4	6.3 JR-2507-0	47	P4	Triode No. 3	Triode No. 3
6AH6	6.3 JR-3567-2	11	P4	Triode No. 1	Triode No. 1
6AH7	6.3 JX-5604-3	20	P4	Triode No. 2	Triode No. 2
6AH7	6.3 JX-2301-6	20	P4	Triode No. 3	Triode No. 3
6AJ4	6.3 JX-1502-0	25	P4	Triode No. 1	Triode No. 1
6AJ6	6.3 JR-3562-0	27	P4	Triode No. 2	Triode No. 2
6AK4	6.3 DW-1805-7	34	P4	Triode No. 3	Triode No. 3
6AK5	6.3 JR-3562-0	24	P4	Triode No. 1	Triode No. 1
6AK6	6.3 JR-3567-2	23	P4	Triode No. 2	Triode No. 2
6AL6	6.3 JR-0703-0	0	P1*	Triode No. 3	Triode No. 3
6AL6	6.3 JR-0205-0	0	P1*	Triode No. 1	Triode No. 1
6AL6	6.3 JR-5047-0	23	P4	Triode No. 2	Triode No. 2
6AL7	6.3 JR-6357-0	Vary	P4	Triode Sect.	1250
195G5	20.0 JR-5073-0	24	P4	Triode Sect.	6000
19C8	20.0 EV-8907-0	23	0	Triode Sect.	500
19C8	20.0 EV-8607-0	0	60	Diode No. 1	Diode No. 1
19C8	20.0 EV-8203-0	0	60	Diode No. 2	Diode No. 2
19C8	20.0 EV-8107-0	0	60	Diode No. 3	Diode No. 3
19CL8A	20.0 EV-9678-0	19	81	Triode Sect.	3000
19CL8A	20.0 EV-1203-0	12	87	Triode Sect.	4500
19EA8	20.0 EV-2637-0	22	78	Pentode Sect.	2500
19EA8	20.0 EV-9108-0	19	85	Triode Sect.	3800
19J6	20.0 JR-5207-6	28	78	Plate No. 1	Plate No. 1
19J6	20.0 JR-6307-5	28	78	Plate No. 2	Plate No. 2
19T8	20.0 EV-8907-6	11	56	Triode Section	1200
19T8	20.0 EV-0607-1	0	50	Diode No. 1	Diode No. 1
19T8	20.0 EV-0203-7	0	50	Diode No. 2	Diode No. 2
19T8	20.0 EV-0107-8	0	50	Diode No. 3	Diode No. 3
19V8	20.0 EV-6103-8	11	56	Triode Sect.	1200
19V8	20.0 EV-0903-2	0	0	Diode No. 1	Diode No. 1
19V8	20.0 EV-0708-6	0	63	Diode No. 2	Diode No. 2
19V8	20.0 EV-0203-8	0	63	Diode No. 3	Diode No. 3
19X3	20.0 EV-0903-0	0	66	P3*	P3*
19X8	20.0 EV-7986-1	10	81	P4	P4
19X8	20.0 EV-2386-1	20	81	P4	P4
19Y3	20.0 EV-0903-0	0	66	P3*	P3*
20EQ7	20.0 EV-2763-1	25	50	P4	P4
20EQ7	20.0 EV-0903-0	0	0	P1*	P1*
20EZ7	20.0 CR-8709-0	12	58	P4	P4
20EZ7	20.0 CR-5604-0	12	58	P4	P4
21A6	20.0 EV-2083-9	46	90	P4	P4
21EX6	20.0 JR-5073-0	53	91	P4	P4
22DE4	25.0 JX-0503-0	0	67	P3*	P3*
25A6	25.0 JR-5347-0	43	76	P4	P4
25AV5	25.0 JR-2873-0	50	86	P4	P4
25AX4	25.0 JX-0503-0	0	60	P3*	P3*
25BK5	25.0 EV-3186-0	0	91	P4	P4
25BQ6	25.0 JR-5047-0	50	87	P4	P4
25C5	25.0 JR-2763-0	23	91	P4	P4
25C6	25.0 JR-5347-0	37	90	P4	P4
25CA5	25.0 JR-2763-0	24	90	P4	P4
25CD6	25.0 JR-5073-0	42	90	P4	P4
25CU6	25.0 JR-5047-0	50	87	P4	P4
25DN6	25.0 JR-5073-0	43	90	P4	P4
25DQ6	25.0 JR-5047-0	32	90	P4	P4
25EC6	25.0 JR-5073-0	62	87	P4	P4
25EH5	25.0 JR-2763-0	26	88	P4	P4
25F5	25.0 JR-2763-0	35	86	P4	P4
25L6	25.0 JR-5347-2	30	90	P4	P4
25W4	25.0 JX-0503-0	0	72	P3*	P3*
25W6	25.0 JR-5347-0	30	90	P4	P4
25Z6	25.0 JR-0507-2	0	40	P3*	P3*
25Z6	25.0 JR-0304-2	0	40	P3*	P3*
26A6	25.0 JR-3567-2	9	86	P4	P4
26A7	25.0 JW-2701-0	10	67	P5*	P5*
26A7	25.0 JW-3401-0	10	67	P5*	P5*
26BK6	25.0 JR-3022-5	6	58	P4	P4
26BK6	25.0 JR-3022-5	6	58	P4	P4











6AW8	6.3 EV-2301-9	1500	Triode Sect.	50X6	50.0 JR-0607-5	0	55	P3*	Plate No. 1
6AX4	6.3 JX-0503-0	-----	Plate No. 1	50X6	50.0 JR-0302-5	0	55	P3*	Plate No. 2
6AX5	6.3 JR-0507-3	-----	Plate No. 2	50Y7	BLST JR-0060-0	0	-----	-----	Short on 1-2-3-4-5
6AX7	6.3 JR-0307-5	-----	Triode No. 1	50Y7	50.0 JR-0507-0	0	55	P3*	Plate No. 1
6AX7	6.3 EV-2103-0	1250	Triode No. 2	50Y7	50.0 JR-0304-0	0	55	P3*	Plate No. 2
6AX8	6.3 EV-2637-0	1250	Pent. Sect.	52	6.3 JR-3240-0	33	77	P4	Triode No. 1
6AX8	6.3 EV-9108-0	2250	Triode Sect.	53	2.5 JR-5604-2	12	65	P4	Triode No. 2
6AZ5	6.3 DW-0807-0	4500	Diode No. 1	55	2.5 JR-3204-6	12	65	P4	Triode Sect. Cap-B
6AZ6	6.3 DW-0204-8	-----	Diode No. 2	55	2.5 JR-0205-0	39	49	P4	SEE NOTE 1. SEE TESTS ON ONE SIDE NO. 1. SEE OTHER SIDE ON NEW SCALE.
6AZ6	6.3 DW-0705-8	-----	Diode No. 1	55	2.5 JR-0405-0	39	0	P1*	Cap-G
6AZ8	6.3 EV-9807-0	4000	Diode No. 2	55	2.5 JR-0305-0	39	0	P1*	Cap-G
6B4	6.3 JR-5300-0	3300	Pent. Sect.	56	2.5 JR-3204-0	29	65	P4	Cap-P
6B7	6.3 JR-0236-0	3000	Triode Sect.	57	2.5 JR-0235-4	21	68	P4	Pent. Sect.
6B7	6.3 JR-0536-0	3000	Diode No. 1	58	2.5 JR-0235-4	24	66	P4	Rect. Sect.
6B7	6.3 JR-0436-0	1000	Diode No. 2	59	2.5 JR-4236-5	22	73	P4	Triode Sect. Cap-B
6BA5	6.3 DW-1678-0	-----	Pent. Sect. Cap-G	60F X5	50.0 JR-2763-0	20	91	P4	Diode No. 1
6BA6	6.3 JR-3567-2	2150	Diode No. 1	HY-65	6.3 JR-5040-7	0	82	P4	Diode No. 2
6BA7	6.3 EV-7913-2	3300	Ampl. Sect.	KT66	6.3 JR-5347-2	20	90	P4	Cap-G
6BA7	6.3 EV-2913-7	750	Osc. Sect.	70L7	75.0 JR-5346-0	41	87	P4	Pent. Sect.
6BA8	6.3 EV-7986-0	750	Pent. Sect.	70L7	75.0 JR-0702-3	41	81	P3*	Rect. Sect.
6BA8	6.3 EV-2301-0	5000	Triode Sect.	75	6.3 JR-0205-0	11	34	P4	Triode Sect. Cap-B
6BC4	6.3 EV-2106-0	2700	Triode Sect.	75	6.3 JR-0405-2	11	0	P1*	Diode No. 1
6BC5	6.3 JR-3562-0	4000	Diode No. 1	75	6.3 JR-0305-2	11	0	P1*	Diode No. 2
6BC7	6.3 EV-0809-0	3200	Diode No. 2	76	6.3 JR-3204-0	29	65	P4	Cap-G
6BC7	6.3 EV-0607-0	-----	Diode No. 2	77	6.3 JR-0235-4	21	58	P4	Cap-G
6BC7	6.3 EV-0201-0	-----	Diode No. 3	80	6.3 JR-0235-4	24	66	P4	Plate No. 1
6BC8	6.3 EV-7608-9	4000	Triode No. 1	80	5.0 JR-0200-0	0	15	P3*	Plate No. 2
6BC8	6.3 EV-2103-9	4000	Triode No. 2	83	5.0 JR-0300-0	0	70	P3*	Plate No. 1
6BD6	6.3 JR-2573-0	5000	Triode No. 2	83	5.0 JR-0200-0	0	65	P3*	Plate No. 2
6BE6	6.3 JR-3562-3	2000	Ampl. Sect.	83V	5.0 JR-0300-0	0	60	P3*	Plate No. 1
6BE7	6.3 EV-7163-9	1425	Osc. Sect.	84	5.0 JR-0200-0	0	35	P3*	Plate No. 2
6BE8	6.3 EV-9678-3	1600	Osc. Sect.	84	6.3 JR-0204-0	0	35	P3*	Plate No. 1
6BF5	6.3 EV-1203-0	1000	Triode Sect. Cap-B	KT88	6.3 JR-3247-2	30	88	P4	Cap-G
6BF5	6.3 JR-3562-0	2250	Triode Sect.	89/89Y	6.3 JR-0235-4	37	66	P4	Pent. Sect.
6BF6	6.3 JR-3702-0	4500	Triode Section	117L7	117.0 JR-4357-0	37	86	P4	Rect. Sect.
6BF6	6.3 JR-3602-0	1900	Diode No. 1	117L7	117.0 JR-0602-0	37	61	P3*	Pent. Sect.
6BF6	6.3 JR-3602-0	1900	Diode No. 2	117M7	117.0 JR-4357-0	37	86	P4	Rect. Sect.
6BF6	6.3 DW-7805-0	2500	Triode No. 1	117M7	117.0 JR-0602-0	37	61	P3*	Pent. Sect.
6BF7	6.3 DW-2104-0	2500	Triode No. 2	117N7	117.0 JR-4356-0	37	87	P4	Rect. Sect.
6BG6	6.3 JR-5073-0	6000	Cap-P	117N7	117.0 JR-0700-0	37	75	P3*	Reverse Meter
6BG7	6.3 DW-7805-0	2500	Triode No. 1	117P7	117.0 JR-4356-0	37	86	P4	Pent. Sect.
6BG7	6.3 DW-2104-0	2500	Triode No. 2	117P7	117.0 JR-0700-0	37	61	P3*	Rect. Sect.
6BH6	6.3 JR-3562-7	2000	Pent. Sect.	117Z3	117.0 JR-0506-0	0	50	P3*	Reverse Meter
6BH8	6.3 EV-7986-0	4500	Triode Sect.	117Z6	117.0 JR-0507-0	0	60	P3*	Plate No. 1
6BJ6	6.3 EV-2301-0	3300	Diode No. 1	X-155	6.3 EV-7608-9	20	86	P4	Plate No. 2
6BJ7	6.3 EV-0809-3	3800	Diode No. 2	X-155	6.3 EV-2103-9	20	86	P4	Triode No. 1
6BJ7	6.3 EV-0607-3	-----	Diode No. 3	CK502AX	1.1 DV-1120-0	35	73	P4	Triode No. 2
6BJ7	6.3 EV-0201-3	-----	-----	GL-502	6.3 JR-5367-0	7	55	P3*	OK over 275 Strikes at about 70

REPLACEMENT ROLL CHARTS FOR YOUR TUBE  
\$1.75 PER CHART OR \$5.00 FOR  
A 2 YEAR SUBSCRIPTION (4 CHARTS)

TESTER ARE AVAILABLE TWICE YEARLY  
A 2 YEAR SUBSCRIPTION (4 CHARTS)



**REPLACEMENT ROLL CHARTS FOR YOUR TUBE**  
\$1.75 PER CHART OR \$5.00 FOR

**TESTER ARE AVAILABLE TWICE YEARLY**  
A 2 YEAR SUBSCRIPTION (4 CHARTS)

Part No.	Quantity	Pinout	Notes	Part No.	Quantity	Pinout	Notes
68J8	24	80	6.3 EV-8709-0	CK503AX	40	73	P4
68J8	0	61	6.3 EV-0603-0	GK506AX	58	0	P4
68J8	0	61	6.3 EV-0102-0	CK512AX	0	0	P1*
68K6	0	61	6.3 EV-3186-0	See note at end of chart.			
68K6	6	58	6.3 JR-3702-5	CK518AX	45	0	P5*
68K6	0	49	6.3 JR-0602-5	CK522AX	40	0	P5*
68K6	0	49	6.3 JR-0502-7	CK523AX	47	0	P5*
68K7	22	85	6.3 EV-7608-9	CK524AX	73	0	P5*
68K7	22	85	6.3 EV-2103-9	CK525AX	50	0	P5*
68L4	0	73	6.3 JX-0203-0	CK526AX	59	0	P5*
68L7	23	88	6.3 JX-2103-0	CK527AX	36	0	P5*
68L7	23	88	6.3 JX-4506-4	CK528AX	37	0	P5*
68M8	30	86	6.3 EV-3672-0	CK529AX	64	0	P5*
68M8	15	61	6.3 EV-1908-0	CK533AX	35	0	P5*
68N4	18	86	6.3 JR-2503-0	CK535AX	64	0	P5*
68N4	0	83	6.3 JR-2503-0	CK541DX	40	0	P5*
68N6	0	28	6.3 JR-2753-5	CK542DX	0	0	P1*
68N6	2	43	6.3 JR-6753-2	CK543DX	0	0	P1*
68N8	26	48	6.3 EV-8709-0	See note at end of chart.			
68N8	0	61	6.3 EV-0603-0	CK544DX	32	0	P5*
68N8	0	61	6.3 EV-0102-0	CK546DX	0	0	P1*
68Q6	13	91	6.3 EV-2793-0	GL-546	66	0	P3*
68Q6	50	87	6.3 JR-5047-0	CK547DX	39	0	P5*
68Q7A	13	88	6.3 EV-7608-9	CK548DX	54	0	P5*
68Q7A	13	88	6.3 EV-2103-9	629	25	0	P3*
68R8	15	76	6.3 EV-9678-0	717A	0	84	P4
68R8	16	87	6.3 EV-1203-0	891A	0	65	P4
68S8	20	86	6.3 EV-7608-9	802	22	73	P4
68S8	20	86	6.3 EV-2103-9	807	33	95	P4
68T6	13	60	6.3 JR-3702-0	809	0	68	P4
68T6	0	0	6.3 JR-3602-0	812	0	75	P4
68T6	0	0	6.3 JR-3502-0	814	0	80	P4
68T8	22	75	6.3 EV-8678-0	815	31	86	P4
68T8	0	30	6.3 EV-0103-0	815	31	86	P4
68T8	0	30	6.3 EV-0203-0	816	0	75	P3*
68U6	34	65	6.3 JR-3702-0	837	0	87	P4
68U6	0	0	6.3 JR-3602-0	841	0	51	P4
68U6	0	0	6.3 JR-3502-0	842	61	56	P4
68U8	0	59	6.3 EV-7821-9	843	12	68	P4
68U8	0	59	6.3 EV-7321-6	884	45	22	P4
68V8	23	86	6.3 EV-2301-0	885	34	19	P4
68V8	0	61	6.3 EV-0907-0	886A	0	75	P3*
68V8	0	61	6.3 EV-0608-0	886	0	73	P5*
68W4	0	20	6.3 EV-0709-1	887	0	91	P5*
68W4	0	20	6.3 EV-0109-7	888	0	91	P5*
68W8	15	76	6.3 EV-6987-0	889	45	45	P4
68W8	0	50	6.3 EV-0302-0	890	35	22	P4
68W8	0	50	6.3 EV-0102-0	951/184	21	54	P4
68X6	13	81	6.3 EV-2791-9	954	22	72	P4
68X7	35	92	6.3 JX-4506-1	955	17	65	P4
68X7	35	92	6.3 JX-2103-5	956	28	23	P4
68X8	33	78	6.3 EV-7608-9	957	41	57	P4
68X8	33	78	6.3 EV-2103-9	958	28	17	P4
68Y5	0	59	6.3 JR-0492-0	959	28	17	P4

Reworked by PAØPGA

This manual was downloaded from BAMA's boatanchor site <http://bama.sbc.edu>





Part No.	Part Description	Quantity	Notes	Part No.	Part Description	Quantity	Notes	Part No.	Part Description	Quantity	Notes
65W4	6.3 EV-07102-7	15	76	2250	Triode Sect.	P4	2250	65W4	6.3 EV-07102-7	15	76
6BW8	6.3 EV-6987-0	0	50	-----	Pent. Sect.	P4	-----	6BW8	6.3 EV-6987-0	0	50
6BW8	6.3 EV-0302-0	0	50	-----	Diode No. 1	P1*	-----	6BW8	6.3 EV-0302-0	0	50
6BW8	6.3 EV-0102-0	0	50	-----	Diode No. 2	P1*	-----	6BW8	6.3 EV-0102-0	0	50
6BX6	6.3 EV-2781-9	13	81	3000	Triode No. 1	P4	3000	6BX6	6.3 EV-2781-9	13	81
6BX7	6.3 JK-4506-1	35	92	7600	Triode No. 1	P4	7600	6BX7	6.3 JK-4506-1	35	92
6BX7	6.3 JX-2103-5	35	92	7600	Triode No. 2	P4	7600	6BX7	6.3 JX-2103-5	35	92
6BX8	6.3 EV-7608-9	33	78	2500	Triode No. 1	P4	2500	6BX8	6.3 EV-7608-9	33	78
6BX8	6.3 EV-2103-9	33	78	2500	Triode No. 2	P4	2500	6BX8	6.3 EV-2103-9	33	78
6BY5	6.3 JR-0462-0	0	59	-----	Plate No. 1	P3*	-----	6BY5	6.3 JR-0462-0	0	59
6BY6	6.3 JR-0507-0	0	59	-----	Plate No. 2	P3*	-----	6BY6	6.3 JR-0507-0	0	59
6BY6	6.3 JR-3562-7	21	56	1200	Triode No. 1	P4	1200	6BY6	6.3 JR-3562-7	21	56
6BY8	6.3 EV-1789-2	16	76	2300	Pent. Sect.	P4	2300	6BY8	6.3 EV-1789-2	16	76
6BY8	6.3 EV-0603-0	0	61	-----	Diode Sect.	P1*	-----	6BY8	6.3 EV-0603-0	0	61
6BZ6	6.3 JR-3562-7	20	78	2500	Triode No. 1	P4	2500	6BZ6	6.3 JR-3562-7	20	78
6BZ7	6.3 EV-7608-9	18	88	5000	Triode No. 2	P4	5000	6BZ7	6.3 EV-7608-9	18	88
6BZ8	6.3 EV-2103-9	18	88	4000	Triode No. 1	P4	4000	6BZ8	6.3 EV-2103-9	18	88
6BZ8	6.3 EV-7608-9	20	86	4000	Triode No. 2	P4	4000	6BZ8	6.3 EV-7608-9	20	86
6C4	6.3 EV-2103-9	20	86	4000	Triode No. 2	P4	4000	6C4	6.3 EV-2103-9	20	86
6C5	6.3 JR-6307-0	24	75	2000	Triode No. 1	P4	2000	6C5	6.3 JR-6307-0	24	75
6C6	6.3 JR-5307-0	21	73	2000	Triode No. 2	P4	2000	6C6	6.3 JR-5307-0	21	73
6CA4	6.3 EV-0703-0	0	57	1225	Cap = G	P3*	-----	6CA4	6.3 EV-0703-0	0	57
6CA4	6.3 EV-0103-0	0	57	-----	Plate No. 1	P3*	-----	6CA4	6.3 EV-0103-0	0	57
6CA5	6.3 JR-2763-0	24	80	6000	Plate No. 2	P4	6000	6CA5	6.3 JR-2763-0	24	80
6CA7	6.3 JR-5347-2	27	90	6000	Cap = P	P4	6000	6CA7	6.3 JR-5347-2	27	90
6CB5	7.5 JR-4023-0	49	87	4500	Cap = P	P4	4500	6CB5	7.5 JR-4023-0	49	87
6CB6	6.3 JR-3562-7	22	78	2200	Cap = P	P4	2200	6CB6	6.3 JR-3562-7	22	78
6CD6	6.3 JR-5073-0	42	90	6500	Cap = P	P4	6500	6CD6	6.3 JR-5073-0	42	90
6CE5	6.3 JR-3562-0	22	75	2200	Cap = P	P4	2200	6CE5	6.3 JR-3562-0	22	75
6CF6	6.3 JR-3562-7	22	75	2200	Cap = P	P4	2200	6CF6	6.3 JR-3562-7	22	75
6CG7	6.3 EV-7608-9	23	73	2000	Triode No. 1	P4	2000	6CG7	6.3 EV-7608-9	23	73
6CG7	6.3 EV-2103-9	23	73	2000	Triode No. 2	P4	2000	6CG7	6.3 EV-2103-9	23	73
6CG8	6.3 EV-9678-0	10	81	3000	Pent. Sect.	P4	3000	6CG8	6.3 EV-9678-0	10	81
6CG8	6.3 EV-1203-0	20	81	3000	Triode Sect.	P4	3000	6CG8	6.3 EV-1203-0	20	81
6CH7	6.3 EV-7608-0	18	88	5000	Triode No. 1	P4	5000	6CH7	6.3 EV-7608-0	18	88
6CH7	6.3 EV-2103-0	18	88	5000	Triode No. 2	P4	5000	6CH7	6.3 EV-2103-0	18	88
6CH8	6.3 EV-7236-0	9	86	4000	Pent. Sect.	P4	4000	6CH8	6.3 EV-7236-0	9	86
6CH8	6.3 EV-8901-0	21	83	3300	Triode Sect.	P4	3300	6CH8	6.3 EV-8901-0	21	83
6CJ6	6.3 EV-2073-1	54	87	4600	Cap = P	P4	4600	6CJ6	6.3 EV-2073-1	54	87
6CK4	6.3 JR-2507-0	44	89	5500	Cap = P	P4	5500	6CK4	6.3 JR-2507-0	44	89
6CK6	6.3 EV-2713-6	5	91	7500	Cap = P	P4	7500	6CK6	6.3 EV-2713-6	5	91
6CL5	6.3 JR-4023-0	55	90	5000	Cap = P	P4	5000	6CL5	6.3 JR-4023-0	55	90
6CL5	6.3 EV-2631-7	18	88	5000	Tetrode Sect.	P4	5000	6CL5	6.3 EV-2631-7	18	88
6CL8	6.3 EV-9678-0	12	81	3000	Triode Sect.	P4	3000	6CL8	6.3 EV-9678-0	12	81
6CL8	6.3 EV-1203-0	12	81	4500	Triode Sect.	P4	4500	6CL8	6.3 EV-1203-0	12	81
6CM6	6.3 EV-3917-0	21	85	3700	Triode No. 1	P4	3700	6CM6	6.3 EV-3917-0	21	85
6CM7	6.3 EV-7603-0	24	73	2000	Triode No. 2	P4	2000	6CM7	6.3 EV-7603-0	24	73
6CM7	6.3 EV-8109-0	20	87	4400	Triode No. 2	P4	4400	6CM7	6.3 EV-8109-0	20	87
6CM8	6.3 EV-2673-0	22	75	2200	Pent. Sect.	P4	2200	6CM8	6.3 EV-2673-0	22	75
6CM8	6.3 EV-9108-0	16	48	1000	Triode Sect.	P4	1000	6CM8	6.3 EV-9108-0	16	48
6CN7	6.3 EV-7806-0	11	56	1200	Triode Sect.	P4	1200	6CN7	6.3 EV-7806-0	11	56
6CN7	6.3 EV-0203-0	0	50	-----	Diode No. 1	P1*	-----	6CN7	6.3 EV-0203-0	0	50
6CN7	6.3 EV-0103-0	0	50	-----	Diode No. 2	P1*	-----	6CN7	6.3 EV-0103-0	0	50
6CQ4	6.3 JX-0603-0	0	67	-----	Tetrode Sect.	P3*	-----	6CQ4	6.3 JX-0603-0	0	67
6CQ8	6.3 EV-2637-0	16	80	2800	Triode Sect.	P4	2800	6CQ8	6.3 EV-2637-0	16	80
6CQ8	6.3 EV-9108-0	23	83	3400	Triode Sect.	P4	3400	6CQ8	6.3 EV-9108-0	23	83
6CR6	6.3 JR-7563-2	12	72	1950	Pent. Sect.	P4	1950	6CR6	6.3 JR-7563-2	12	72
6CR6	6.3 JR-0203-0	0	0	-----	Diode Sect.	P1*	-----	6CR6	6.3 JR-0203-0	0	0
6CR8	6.3 EV-2673-8	12	82	2800	Pent. Sect.	P4	2800	6CR8	6.3 EV-2673-8	12	82
6CR8	6.3 EV-9108-0	25	79	2600	Triode Sect.	P4	2600	6CR8	6.3 EV-9108-0	25	79















Reworked by  
PAØPGA

This manual was downloaded from BAMA's  
boatanchor site <http://bama.sbc.edu>



6FM8	6.3 EV-8907-0	11	56	P4	1200	Triode Sect.	5905	25.0DW-1572-0	35	48	P4	1000	Ampl. Sect.
6FM8	6.3 EV-0601-0	0	50	P1*	-----	Diode No. 1	5906	25.0DW-1572-0	23	73	P4	2000	Osc. Sect.
6FM8	6.3 EV-0203-0	0	50	P1*	2500	Diode No. 2	5907	25.0DW-1572-0	36	56	P4	1200	
6FO5	6.3 JR-2507-0	27	78	P4	2150		5908	25.0DW-1572-4	40	48	P4	1000	
6FS5	6.3 JR-3567-0	23	75	P4	2000		5910	1.5 DX-6210-0	19	27	P4	700	
6FV6	6.3 JR-3567-2	24	73	P4	2100		5915	6.3 JR-7562-3	20	56	P4	1200	
6FV8	6.3 EV-9678-0	17	79	P4	2700	Pent. Sect.	5916	6.3 JR-3562-7	10	65	P4	1500	
6FW5	6.3 EV-1203-0	23	86	P4	4250	Triode Sect.	5916	25.0DW-1572-4	22	59	P4	1300	
6FW5	6.3 JR-2573-0	50	90	P4	6000		5930	2.5 JR-3200-0	67	82	P4	3000	
6FW8	6.3 EV-7608-0	20	93	P4	7800	Triode No. 1	5931	5.0 HR-0600-0	0	35	P3*	-----	Plate No. 1
6FW8	6.3 EV-2103-0	20	93	P4	7800	Triode No. 2	5931	5.0 HR-0400-0	0	30	P3*	-----	Plate No. 2
6FY8	6.3 EV-3672-0	32	88	P4	5000	Pent. Sect.	5932	6.3 JR-5347-2	23	88	P4	5000	
6FY8	6.3 EV-1908-0	27	89	P4	850	Triode Sect.	5933	6.3 JR-3024-0	33	85	P4	3600	Cap-P
6GB	6.3 JR-5347-0	23	74	P4	2100		5953	12.6 EV-7608-0	24	75	P4	2200	Triode No. 1
6GC5	6.3 EV-8917-0	30	90	P4	6500		5953	12.6 EV-2103-0	24	75	P4	2200	Triode No. 2
6GEB	6.3 EV-8917-0	23	63	P4	1450	Pent. Sect.	5963	6.3 JR-5207-6	24	81	P4	3000	Triode No. 1
6GEB	6.3 EV-3602-0	58	88	P4	4300	Triode Sect.	5964	6.3 JR-6307-5	24	81	P4	3000	Triode No. 2
6GHB	6.3 EV-2637-0	13	85	P4	4000	Pent. Sect.	5965	12.6 EV-7608-1	24	81	P4	3000	Triode No. 1
6GHB	6.3 EV-9108-0	12	89	P4	5800	Triode Sect.	5965	12.6 EV-2103-6	24	81	P4	3000	Triode No. 2
6GK5	6.3 JR-2507-6	27	81	P4	2900		5967	1.1 ES-6801-3	39	48	P4	1000	Triode No. 1
6GK5	6.3 EV-2781-3	10	92	P4	8000		5967	1.1 ES-3108-6	39	48	P4	1000	Triode No. 2
6GM6	6.3 JR-3562-7	23	78	P4	2500		5971	1.1 FT-2100-0	20	59	P4	1300	
6GN8	6.3 EV-7986-0	20	89	P4	5500	Pent. Sect.	5975	6.3 EV-3102-0	34	79	P4	2700	
6GN8	6.3 EV-2301-0	22	45	P4	950	Triode Sect.	5977	6.3DW-1805-3	40	73	P4	2000	
6GS8	6.3 EV-7821-9	0	50	P4	1100	Pent. No. 1	5987	6.3DW-1205-0	74	71	P4	1850	
6GS8	6.3 EV-7321-6	0	50	P4	1100	Pent. No. 2	5992	6.3 JR-5347-0	21	84	P4	3500	
6GW6	6.3 JR-5047-0	60	85	P4	3900	Cap-P	5993	6.3 DX-0905-1	0	35	P3*	-----	Plate No. 1
6GY8	OFF EV-0607-0	Use this setting for short check only.					5993	6.3 DX-0105-9	0	35	P3*	-----	Plate No. 2
6GY8	OFF FU-3908-0	Use this setting for short check only.					5995	6.3 ET-0105-0	0	55	P3*	-----	Leads - 1-3-4-5
6GY8	6.3 EV-0607-0	0	55	P1*	1200	Triode No. 1, sheet on 3	6005	6.3 JR-3562-0	21	85	P4	3700	
6GY8	6.3 FU-3908-0	27	49	P4	1200	Triode No. 2, sheet on 3	6007	1.1 DV-4210-0	20	0	P1*	-----	Strikes at about 35
6GY8	6.3 FU-1200-0	34	49	P4	1200	Triode No. 3	6008	0.6 DV-4210-0	24	0	P1*	-----	Triode No. 1
6H5	6.3 JR-5403-0	---	---	P4	-----	Eye Open	6012	6.3 JR-3502-7	92	78	P4	2500	Triode No. 2
6H5	6.3 JR-5423-0	---	---	P4	-----	Eye Closed	6021	6.3DW-7805-0	25	78	P4	2500	
6H6	6.3 JR-0507-0	0	61	P1*	-----	Diode No. 1	6021	6.3DW-2104-0	25	78	P4	2700	
6H6	6.3 JR-0304-0	0	61	P1*	-----	Diode No. 2	6026	6.3 EV-7803-0	32	79	P4	1500	
6HJ8	6.3 EV-2631-9	20	79	P4	2500	Pent. Sect.	6028	20.0 JR-3562-0	34	65	P4	2000	
6HJ8	6.3 EV-0807-0	0	60	P4	750	Diode Sect.	6029	1.1 CU-3100-0	34	73	P4	1000	
6HS8	6.3 EV-7821-9	10	31	P4	750	Pent. No. 1	6050	1.1 ES-3100-0	36	49	P4	1000	
6HS8	6.3 EV-7321-6	10	31	P4	750	Pent. No. 2	6052	6.3DW-0507-4	0	60	P3*	-----	Plate No. 1
6J4	6.3 JR-3702-0	24	90	P4	6000		6052	6.3DW-0102-4	0	60	P3*	-----	Plate No. 2
6J5	6.3 JR-5307-0	23	73	P4	2000		6055	25.0DW-1805-0	43	48	P4	1000	Triode No. 1
6J6	6.3 JR-5207-0	20	81	P4	3000	Triode No. 2	6072	12.6 EV-7608-0	15	58	P4	1250	Triode No. 2
6J6	6.3 JR-6307-0	20	81	P4	3000	Cap-G	6072	12.6 EV-2103-0	15	58	P4	3400	Triode No. 1
6J7	6.3 JR-0347-5	22	58	P4	1225	Heptode Cap-G	6080	7.5 JX-4506-1	100	83	P4	3400	Triode No. 2
6B8	6.3 JR-5347-6	18	50	P4	1000	Triode	6080	7.5 JX-2103-6	100	83	P4	3400	Triode No. 1
6B8	6.3 JR-5647-3	30	0	P4	500		6082	25.0 JX-4506-1	100	83	P4	3400	Triode No. 2
6K4	6.3 DU-2105-0	39	74	P4	1900		6082	25.0 JX-2103-6	100	83	P4	3400	Triode No. 2
6K5	6.3 JR-5347-0	34	67	P4	1600	Cap-G	6084	6.3 EV-9613-8	20	63	P4	1300	
6K7	6.3 JR-0347-6	19	66	P4	1450	Cap-G	6085	12.6 EV-7608-0	11	78	P4	2500	Triode No. 1
6K8	6.3 JR-5347-6	11	50	P4	1000	Hexode Cap-G	6085	12.6 EV-2103-0	11	78	P4	2500	Triode No. 2
6K8	6.3 JR-6647-3	0	77	P4	2400	Triode	6086	20.0 EV-2513-9	20	87	P4	4500	
6L4	6.3 JR-2306-0	34	81	P4	3000		6087	5.0 HR-0600-0	0	30	P3*	-----	Plate No. 1
6L5	6.3 JR-5307-0	27	68	P4	1500		6087	5.0 HR-0400-0	0	30	P3*	-----	Plate No. 2
6L6	6.3 JR-5347-2	23	88	P4	5000		6088	1.1 DV-4120-0	34	0	P5*	-----	
6L7	6.3 JR-0347-5	23	24	P4	600	Cap Grid Cap-G	6094	6.3 DV-1428-0	21	85	P4	3700	
6L7	6.3 JR-5347-2	27	24	P4	650	Pin Grid	6096	6.3 JR-3562-0	24	65	P4	1500	
6M3	6.3 HR-0003-0	0	68	P3*	-----	Cap-2, insert extra sheet on 1	6097	6.3 JR-0703-0	0	61	P1*	-----	Diode No. 1
6N4	6.3 JR-3502-0	18	87	P4	4500	Triode No. 1	6097	6.3 JR-0205-0	0	61	P1*	-----	Diode No. 2
6N7	6.3 JR-5607-3	12	65	P4	1500	Triode No. 2	6098	6.3 GX-9858-0	34	89	P4	5400	







68C7	6.3 JX-3106-5	1000	Triode No. 2	6197	6.3 EV-2631-7	18	88	P4	4000	Triode No. 1
68D7	6.3 JR-4765-3	2500		6201	12.6 EV-7608-0	10	86	P4	4000	Triode No. 2
68F5	6.3 JX-3501-2	1000	Pent. Sect.	6201	12.6 EV-2103-0	10	86	P4	4000	Triode No. 1
68F7	6.3 JX-1643-2	2000	Diode Sect.	6202	6.3 JR-0607-3	0	20	P3*		Plate No. 2
68F7	6.3 JX-0543-6	3300		6202	6.3 JR-0307-6	0	20	P3*		Plate No. 1
68G7	6.3 JR-4765-2	3400		6203	6.3 EV-0907-1	0	38	P3*		Plate No. 2
68H7	6.3 JR-4765-2	1575		6203	6.3 EV-0107-9	0	38	P3*		
68J7	6.3 JR-4765-3	1900		6206	6.3 DW-1572-4	22	78	P4	2500	
68K7	6.3 JR-4765-3	1250	Triode No. 1	6211	6.3 DW-1572-4	21	73	P4	2000	Triode No. 1
68L7	6.3 JX-4506-1	1250	Triode No. 2	6211	12.6 EV-7608-2	30	73	P4	2000	Triode No. 2
68M7	6.3 JX-2103-5	2000	Triode No. 1	6216	12.6 EV-2103-7	30	73	P4	2000	Triode No. 2
68N7	6.3 JX-4506-1	2000	Triode No. 2	6221	6.3 EV-2173-0	20	93	P4	10000	
68O7	6.3 JX-2103-5	750	Triode Sect.	6222	6.3 DW-1805-0	29	74	P4	2200	
68P7	6.3 JX-0503-6	1900	Diode No. 1	6223	6.3 DW-1805-0	29	0	P4	2000	
68Q7	6.3 JX-0403-6	1900	Diode No. 2	6223	6.3 DW-1578-0	24	72	P4	2000	
68R7	6.3 JX-1603-2	18	Triode Sect.	6225	6.3 DW-1572-0	20	75	P4	2200	
68R7	6.3 JX-0503-6	18	Triode Sect.	6245	6.3 DU-7126-5	24	65	P4	1500	
68R7	6.3 JX-0403-6	18	Diode No. 1	6247	6.3 DW-2805-0	14	65	P4	1600	
68S7	6.3 JR-4765-3	19	Diode No. 2	6365	6.3 JR-3562-7	16	72	P4	2000	
68T7	6.3 JX-1603-2	15	Triode Sect.	6365	1.5 ES-3100-0	46	55	P4	1150	Cap=P
68T7	6.3 JX-0503-6	15	Diode No. 1	6365	6.3 JR-5032-0	27	94	P4	7300	Triode No. 1
68T7	6.3 JX-0403-6	15	Diode No. 2	6365	12.6 EV-8607-3	31	81	P4	3000	Triode No. 2
68T7	6.3 JX-0403-6	15	Triode No. 1	6350	12.6 EV-3102-8	31	81	P4	3000	{Eye 1 Open Eye 2 Closed Eye 1 Closed Eye 2 Open
68U7	6.3 JX-4506-1	5	Triode No. 2	6355	6.3 FR-3607-0	0	---	P4	---	
68V7	6.3 JX-2103-5	5	Pentode Section	6355	6.3 FR-8327-0	0	---	P4	---	
68V7	6.3 JX-1643-0	12	Diode Section	6355	6.3 KR-7608-5	20	86	P4	4000	Triode No. 1
68V7	6.3 JX-1543-0	40		6385	6.3 KR-3402-5	20	86	P4	4000	Triode No. 2
68V7	6.3 JR-2305-0	11		6397	2.5 HR-8360-0	30	72	P4	1950	
68V7	6.3 EV-8907-6	0	Triode Section	6414	12.6 EV-7608-0	26	72	P4	2000	Triode No. 1
68V7	6.3 EV-0607-1	0	Diode No. 1	6414	12.6 EV-2103-0	26	72	P4	2000	Triode No. 2
68V7	6.3 EV-0203-7	0	Diode No. 2	6417	12.6 EV-9167-3	8	91	P4	7000	
68V7	6.3 EV-0107-8	0	Diode No. 3	6418	1.5 DV-0204-1	0	0	P1*	---	OK OVER THE END SCALE MARK NO GAS TEST
68V7	6.3 EV-0903-0	0		6463	12.6 EV-8607-1	27	85	P4	4000	Triode No. 1
68V7	6.3 JX-0503-0	0	Eye Open	6463	12.6 EV-3102-6	27	85	P4	4000	Triode No. 2
68V7	6.3 JR-5403-0	33	Eye Closed	6485	6.3 JR-3567-2	11	88	P4	5000	
68V7	6.3 JR-5423-0	15	Pent. Sect.	6519	1.5 DV-4210-0	0	0	P1*	---	OK OVER THE END SCALE MARK NO GAS TEST
68V7	6.3 JR-5347-0	16	Triode Sect.	6533	6.3 GX-2105-0	15	27	P4	700	OK OVER THE END SCALE MARK NO GAS TEST
68V7	6.3 EV-2637-0	0	ok-a, arrest meter	6611	1.5 DV-0204-1	0	0	P1*	---	OK OVER THE END SCALE MARK NO GAS TEST
68V7	6.3 EV-0108-0	0	Plate No. 1	6612	1.5 DV-0204-1	0	0	P1*	---	OK OVER THE END SCALE MARK NO GAS TEST
68V7	6.3 EV-0703-1	0	Plate No. 2	6650	6.3 JR-3567-2	9	83	P4	3300	Diode No. 1
68V7	6.3 JX-5340-0	31		6650	6.3 JR-3567-2	15	73	P4	2000	Diode No. 2
68V7	6.3 JX-5347-2	21	Triode Sect.	6651	6.3 JR-3562-7	0	85	P4	3800	
68V7	6.3 EV-6103-9	11	Diode No. 1	6678	6.3 EV-2637-0	15	76	P4	3700	
68V7	6.3 EV-0903-2	0	Diode No. 2	6678	6.3 EV-9108-0	16	87	P4	2250	Pent. Sect.
68V7	6.3 EV-0708-6	0	Diode No. 3	6679	12.6 EV-7608-0	10	86	P4	4800	Triode Sect.
68V7	6.3 EV-0203-8	0		6679	12.6 EV-2103-0	10	86	P4	4800	Triode No. 1
68V7	6.3 JX-0503-0	0		6680	12.6 EV-7608-0	24	75	P4	2200	Triode No. 2
68V7	6.3 JR-5347-0	30	Plate No. 1	6680	12.6 EV-2103-0	24	75	P4	2200	Triode No. 1
68V7	6.3 JR-0607-3	0	Plate No. 2	6681	12.6 EV-7608-0	12	58	P4	1250	Triode No. 2
68V7	6.3 JR-0307-6	0		6681	12.6 EV-2103-0	12	58	P4	1250	Triode No. 1
68V7	6.3 JR-0507-2	0		6681	6.3 DW-7508-0	22	78	P4	2500	Triode No. 2
68V7	6.3 JR-0307-2	0		6681	6.3 DW-2104-0	22	78	P4	2500	Triode No. 1
68V7	6.3 EV-7986-1	10	Triode Sect.	6681	6.3 EV-0907-0	0	65	P3*	---	Plate No. 1
68V7	6.3 EV-2386-1	20		6681	6.3 EV-0103-0	0	65	P3*	---	Platn No. 2
68V7	6.3 JR-5347-0	44		6690						
68V7	6.3 JR-0304-0	0		6690						
68V7	6.3 JR-0204-0	0		6690						
68V7	6.3 JR-0507-0	0		6754						
68V7		0		6754						



Reworked by  
PAØPGA

This manual was downloaded from BAMA's  
boatanchor site <http://bama.sbc.edu>





6X5	6.3 JR-0307-2	0	35	P3*	3000	Plate No. 2	6680	12.6 EV-2103-0	24	75	P4	2200	Triode No. 2
6X8	6.3 EV-7986-1	10	81	P4	3000	Pent. Sect.	6681	12.6 EV-7608-0	12	58	P4	1250	Triode No. 1
6X8	6.3 EV-2386-1	20	81	P4	3000	Triode Sect.	6681	12.6 EV-2103-0	12	58	P4	1250	Triode No. 2
6Y6	6.3 JR-5847-0	44	80	P4	6000		6690	6.3 DW-7508-0	22	78	P4	2500	Triode No. 1
6Z4	6.3 JR-0304-0	0	35	P3*		Plate No. 1	6690	6.3 DW-2104-0	22	78	P4	2500	Triode No. 2
6Z4	6.3 JR-0204-0	0	35	P3*		Plate No. 2	6754	6.3 EV-0907-0	0	65	P3*		Plate No. 1
6ZY5	6.3 JR-0507-0	0	30	P3*		Plate No. 1	6754	6.3 EV-0103-0	0	65	P3*		Plate No. 2
6ZY5	6.3 JR-0307-0	0	30	P3*		Plate No. 2	6788	6.3 DW-1572-0	25	0	P4	550	
7A4	6.3 JR-6207-0	23	73	P4	2000		6814	6.3 DW-1805-0	31	79	P4	2450	
7A5	6.3 JR-6237-0	28	87	P4	6000		6829	12.6 EV-7608-0	24	81	P4	3000	Triode No. 1
7A6	6.3 JR-0607-5	0	49	P1*		Diode No. 1	6829	12.6 EV-2103-0	24	81	P4	3000	Triode No. 2
7A6	6.3 JR-0302-5	0	49	P1*		Diode No. 2	6832	6.3 DW-7605-0	30	50	P4	1050	Triode No. 1
7A7	6.3 JR-6237-4	27	71	P4	1750		6832	6.3 DW-2104-0	30	50	P4	1050	Triode No. 2
7A8	6.3 JR-6207-4	20	50	P4	1000	Ampl. Sect.	6877	6.3 DV-1408-0	59	87	P4	4300	
7A8	6.3 JR-4357-6	20	0	P4	500	Osc. Sect.	6883	12.6 JR-5032-7	28	91	P4	7000	Cap=P
7AD7	6.3 JR-6237-4	10	90	P4	6200		6887	6.3 JR-0703-0	0	59	P1*		Diode No. 1
7AF7	6.3 JR-5607-0	21	79	P4	2600	Triode No. 1	6887	6.3 JR-0205-0	0	59	P1*		Diode No. 2
7AF7	6.3 JR-4302-0	21	79	P4	2600	Triode No. 2	6888	6.3 JR-4765-3	30	77	P4	2350	
7AG7	6.3 JR-6237-4	0	82	P4	3000		6919	6.3 JR-0703-6	0	61	P1*		Diode No. 1
7AH7	6.3 JR-6237-4	0	83	P4	3300		6919	6.3 JR-0205-6	0	61	P1*		Diode No. 2
7AK7	6.3 JR-6237-4	0	85	P4	4000		6943	6.3 DW-1572-4	21	73	P4	2100	
7AU7	6.3 EV-7608-0	24	75	P4	2200	Triode No. 1	6944	6.3 DW-1572-4	21	73	P4	2100	
7AU7	6.3 EV-2103-0	24	75	P4	2200	Triode No. 2	6945	6.3 DW-1572-0	44	83	P4	3200	
7B4	6.3 JR-6207-0	12	82	P4	1000		6946	6.3 DW-1805-0	29	80	P4	3000	
7B7	6.3 JR-6237-4	27	70	P4	1700		6954	6.3 JR-3562-7	13	73	P4	2000	
7C6	6.3 JR-6237-0	30	82	P4	3000		6973	6.3 EV-3917-0	20	87	P4	4800	
7C6	6.3 JR-3207-0	10	18	P4	600	Triode Sect.	7025	12.6 EV-7608-0	12	58	P4	1250	Triode No. 1
7C6	6.3 JR-0607-2	10	0	P1*		Diode No. 1	7025	12.6 EV-2103-0	12	58	P4	1250	Triode No. 2
7C6	6.3 JR-0507-2	10	0	P1*		Diode No. 2	7027	6.3 JR-5327-0	23	88	P4	5000	
7D7	6.3 JR-6237-4	22	60	P4	1300		7036	6.3 JR-7562-3	20	56	P4	1200	Ampl. Sect.
7E6	6.3 JS-1304-0	15	82	P4	3000		7036	6.3 EV-3562-7	10	65	P4	1500	Osc. Sect.
7E6	6.3 JR-3207-0	18	72	P4	1900	Triode Sect.	7044	12.6 EV-7906-0	28	90	P4	6500	Triode No. 1
7E6	6.3 JR-0607-2	18	0	P1*		Diode No. 1	7044	12.6 EV-2103-0	28	90	P4	6500	Triode No. 2
7E6	6.3 JR-0507-2	18	0	P1*		Diode No. 2	7054	12.6 EV-2781-3	13	90	P4	6000	
7E7	6.3 JR-0407-2	22	60	P4	1300	Pent. Sect.	7055	12.6 EV-0703-6	0	61	P1*		Diode No. 1
7E7	6.3 JR-0307-2	22	0	P1*		Diode No. 1	7055	12.6 EV-0205-6	0	61	P1*		Diode No. 2
7E7	6.3 JR-0307-2	22	0	P1*		Diode No. 2	7056	12.6 EV-3562-7	22	76	P4	2200	
7EY6	7.5 JR-5347-0	30	87	P4	4400		7057	12.6 EV-7608-9	18	88	P4	5000	Triode No. 1
7F7	6.3 JR-5607-3	0	60	P4	1300	Triode No. 1	7057	12.6 EV-2103-9	18	88	P4	5000	Triode No. 2
7F7	6.3 JR-4302-6	0	60	P4	1300	Triode No. 2	7058	12.6 EV-7908-0	12	58	P4	1250	Triode No. 1
7F8	6.3 HS-8605-0	10	86	P4	4000	Triode No. 1	7058	12.6 EV-2103-0	12	58	P4	1250	Triode No. 2
7F8	6.3 HS-1304-0	10	86	P4	4000	Triode No. 2	7059	12.6 EV-2637-0	15	76	P4	2250	Pent. Sect.
7G7	6.3 JR-6237-4	18	73	P4	2000		7059	12.6 EV-9108-0	16	87	P4	4500	Triode Sect.
7H7	6.3 JR-6237-4	10	82	P4	3000		7060	12.6 EV-8679-0	18	83	P4	3000	Pent. Sect.
7J7	6.3 JR-6267-4	18	38	P4	800	Heptode Sect.	7060	12.6 EV-2103-0	22	76	P4	2200	Triode Sect.
7J7	6.3 JR-4367-6	18	51	P4	1000	Triode Sect.	7061	12.6 EV-3917-0	21	85	P4	3700	
7K7	6.3 JR-4302-0	0	50	P4	1000	Triode Sect.	7119	12.6 EV-7906-0	20	93	P4	10000	Triode No. 1
7K7	6.3 JR-0607-0	0	0	P1*		Diode No. 1	7119	12.6 EV-2103-0	20	93	P4	10000	Triode No. 2
7L7	6.3 JR-0607-0	0	0	P1*		Diode No. 2	7167	12.6 EV-3562-0	23	81	P4	3000	
7N7	6.3 JR-5607-3	12	73	P4	2000		7189	6.3 EV-2793-0	14	92	P4	8000	
7N7	6.3 JR-4302-6	23	73	P4	2000	Triode No. 1	7199	6.3 EV-7236-0	10	86	P4	3500	Pent. Sect.
7O7	6.3 JR-6237-4	21	0	P4	500	Ampl. Sect.	7199	6.3 EV-9108-0	30	76	P4	2100	Triode Sect.
7O7	6.3 JR-4237-6	21	40	P4	800	Osc. Sect.	7233	6.3 EV-2908-0	10	0	P3*		Diode No. 1
7R7	6.3 JR-6267-0	10	82	P4	3000	Pent. Sect.	7247	12.6 EV-7608-0	12	58	P4	1250	Triode No. 1
7R7	6.3 JR-0407-2	10	0	P1*		Diode No. 1	7258	12.6 EV-2103-0	24	75	P4	2200	Triode No. 2
7R7	6.3 JR-0307-2	10	0	P1*		Diode No. 2	7258	12.6 EV-8679-1	15	84	P4	3500	Pent. Sect.
7V7	6.3 JR-6237-4	6	86	P4	4000		7355	12.6 EV-2173-6	19	87	P4	4400	Triode Sect.
7W7	6.3 JR-6237-5	11	82	P4	3000		7360	6.3 EV-6375-0	19	91	P4	7600	
7X6	6.3 JR-0607-5	0	55	P3*		Plate No. 1	7370	6.3 EV-3621-9	23	48	P4	1100	CONNECT PIN 1 TO PIN 3 AND PIN 4 TO PIN 7 ON LOCAL
7X6	6.3 JR-0307-5	0	55	P3*		Plate No. 2	7370	20.0 FY-7906-0	29	88	P4	5000	Triode No. 1









8GN8	7.5	EV-7986-0	20	89	P4	5500	Pent. Sect.
8GN8	7.5	EV-2301-0	22	45	P4	950	Triode Sect.
8SN7	7.5	JX-4506-1	23	73	P4	2000	Triode No. 1
8SN7	7.5	JX-2103-5	23	73	P4	2000	Triode No. 2
9AU7	10.0	EV-7608-0	24	75	P4	2200	Triode No. 1
9AU7	10.0	EV-2103-0	24	75	P4	2200	Triode No. 2
9BR7	10.0	EV-2103-0	10	86	P4	4000	Triode Sect.
9BR7	10.0	EV-0766-0	0	56	P1*	.....	Diode No. 1
9BR7	10.0	EV-0608-0	0	56	P1*	.....	Diode No. 2
9CL8	10.0	EV-9678-0	12	81	P4	3000	Tetrode Sect.
9CL8	10.0	EV-1203-0	12	87	P4	4500	Triode Sect.
9DZ8	10.0	EV-3672-0	29	89	P4	5500	Pent. Sect.
9DZ8	10.0	EV-1908-0	25	0	P4	500	Triode Sect.
9U8	10.0	EV-2637-0	15	76	P4	2250	Pent. Sect.
9U8	10.0	EV-9108-0	16	87	P4	4500	Triode Sect.
9X8	10.0	EM-7986-1	10	81	P4	3000	Pent. Sect.
9X8	10.0	EV-2336-1	20	81	P4	3000	Triode Sect.
10BQ5	10.0	EV-2793-0	13	91	P4	7500	.....
10C8	10.0	EV-8679-0	17	81	P4	3600	Pent. Sect.
10C8	10.0	EV-2103-0	21	73	P4	2000	Triode Sect.
10DA7	10.0	EV-7608-0	23	79	P4	2600	Triode No. 1
10DA7	10.0	EV-3109-0	55	88	P4	4700	Triode No. 2
10DE7	10.0	EV-7608-0	35	50	P4	1300	Triode No. 1
10DE7	10.0	EV-2103-0	54	88	P4	6500	Triode No. 2
10DR7	10.0	EV-7608-0	16	43	P4	900	Triode No. 1
10DR7	10.0	EV-2109-0	55	89	P4	5400	Triode No. 2
10EG7	10.0	JX-4606-0	30	73	P4	2800	Triode No. 1
10EG7	10.0	JX-2103-0	55	91	P4	7500	Triode No. 2
10EW7	10.0	EV-7608-0	34	64	P4	1500	Triode No. 1
10EW7	10.0	EV-2109-0	52	93	P4	7000	Triode No. 2
11C5	10.0	JR-2783-0	34	88	P4	4500	.....
11CY7	10.0	EV-7608-0	23	0	P4	500	Triode No. 1
11CY7	10.0	EV-2103-0	54	86	P4	4000	Triode No. 2
12A4	12.6	EV-2901-0	31	88	P4	5000	.....
12A7	12.6	JR-0886-5	48	48	P4	975	Pent. Sect. Cap-6
12A7	12.6	JR-0804-2	0	40	P3*	.....	Rect. Sect.

THE HICKOK ELECTRICAL INSTRUMENT COMPANY—CLEVELAND, OHIO  
COPYRIGHT 1961

**STOP**

3-1-61

**MODEL 532-533-533DM-534**

**NOTE:** When testing the 1V2 tube, make **LINE TEST** at 1000 instead of 1500 and set filament switch on 1.1. Tubes should read above **DIODES** OK.

When testing the 19J6 tube with the 532-534 tube testers, use 1250 for **LINE TEST** instead of 1500. Set filament switch on 25. Set Bias on 25. That will reduce the filament voltage to 20 volts.

When testing 19T8 tube with the 532-534 tube testers, use 1250 for **LINE TEST** instead of 1500. Set filament switch on 25. Set Bias on 0. That will reduce the filament voltage to 20 volts.

When testing the 19B6 tubes with testers not having 20 volt Fil. Tap set **FIL.** on 25 volts and make **LINE TEST** with meter pointer on (?).

A dagger † in the **FIL.** column means that on tube testers not having the 0.6 volt filament tap the filament switch should be set on 1.1 and **LINE TEST** made at 1100 on the 3000 scale. The **MICROMHOS** switch should be set on English.

**SUBMINIATURE TUBES:**

**ROUND**—Leads are numbered in a clockwise direction and Lead No. 1 is identified by an arrow on the side of the tube.

**FLAT**—Lead No. 1 is identified by a red dot.

**STOP**

3-1-61

**534A-534B-600 TUBE 7**







# K4XL's

# BAMA

This manual is provided free of charge from the "Boatanchor Manual Archive", as a service to the Boatanchor community. It was uploaded by someone who wanted to help you repair and maintain your equipment.

If you paid anyone other than **BAMA** for this manual, you paid someone who is making a profit from the free labor of others, without asking their permission


You may pass on copies of this manual to anyone who needs it. But do it without charge.

Thousands of files are available without charge from **BAMA**. Visit us at: <http://bama.sbc.edu>

**Real radio's have tubes!  
Keep them glowing !!**

File credits:

**Ross Stovall**

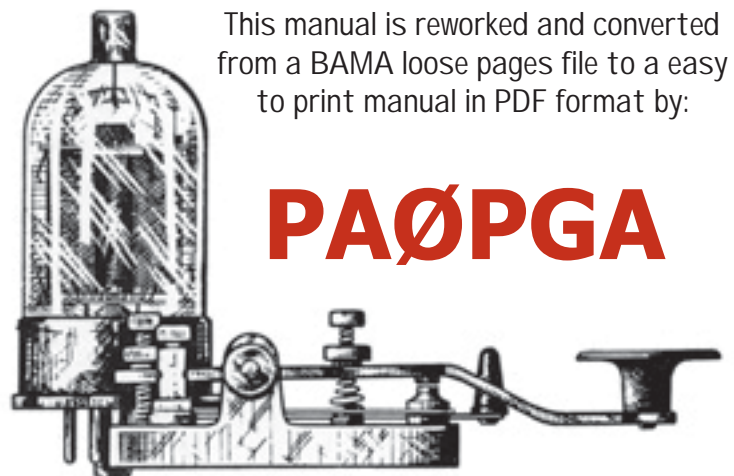

This manual is reworked and converted from a BAMA loose pages file to a easy to print manual in PDF format by:

# PAØPGA



Reworked by  
**PAØPGA**

This manual was downloaded from **BAMA's** boatanchor site <http://bama.sbc.edu>

