


# RCA-2A5

## POWER AMPLIFIER PENTODE



The 2A5 is a heater-cathode type of power-amplifier pentode for use in the audio-output stage of a-c receivers. It is capable of giving large power output with a relatively small input-signal voltage. Because of the heater-cathode construction, a uniformly low hum-level is attainable in power-amplifier design.

### CHARACTERISTICS

HEATER VOLTAGE (A. C. or D. C.).....	2.5
HEATER CURRENT .....	1.75
BULB .....	
BASE .....	

Volts  
Amperes  
ST-14  
Medium 6-Pin

Other characteristics of this type are the same as for type 42.

### INSTALLATION

The base pins of the 2A5 fit the standard six-contact socket which may be installed to hold the tube in any position.


The bulb of this tube will become very hot under certain conditions of operation. Sufficient ventilation should be provided to prevent overheating.

The heater is designed to operate at 2.5 volts. The transformer winding supplying the heater circuit should be designed to operate the heater at this recommended value for full-load operating conditions at average line voltage.

The cathode should preferably be connected directly to a mid-tap on the heater winding or to a center-tapped resistor across the heater winding. If this practice is not followed, the potential difference between heater and cathode should be kept as low as possible.

### APPLICATION

Refer to APPLICATION on type 6F6. Additional curve information is given under type 42.

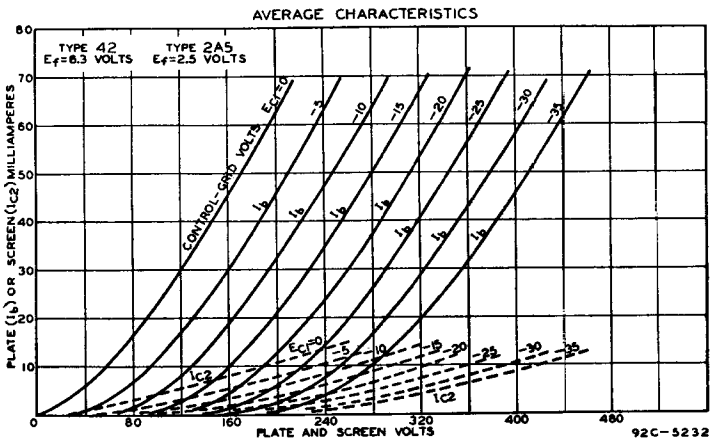



**page**

1

2

**2A5  
sheet**

53

FP

**date**

1937

1999.10.10