


# RCA-26

## AMPLIFIER



The 26 is an amplifier tube containing a filament designed for operation on alternating current. This tube is for use as an r-f or a-f amplifier in equipment designed for

its characteristics. The 26 is not ordinarily suitable for use as a detector or power output tube.

### CHARACTERISTICS

FILAMENT VOLTAGE (A. C. or D. C.)			1.5	Volts
FILAMENT CURRENT			1.05	Amperes
PLATE VOLTAGE	90	135	180	max. Volts
GRID VOLTAGE*	-7	-10	-14.5	Volts
PLATE CURRENT	2.9	5.5	6.2	Milliamperes
PLATE RESISTANCE	8900	7600	7300	Ohms
AMPLIFICATION FACTOR	8.3	8.3	8.3	
TRANSCONDUCTANCE	935	1100	1150	Micromhos
GRID-PLATE CAPACITANCE			8.1	$\mu\mu\text{f}$
GRID-FILAMENT CAPACITANCE			2.8	$\mu\mu\text{f}$
PLATE-FILAMENT CAPACITANCE			2.5	$\mu\mu\text{f}$
BULB				ST-14
BASE				Medium 4-Pin


\* Grid voltage measured from mid-point of a-c operated filament.

### INSTALLATION AND APPLICATION

The base pins of the 26 fit the standard four-contact socket, which should be installed to hold the tube in a vertical position.

The coated filament of the 26 should be operated at the rated voltage of 1.5 volts from the a-c line through a step-down transformer.

As an amplifier, the 26 should be operated as shown under CHARACTERISTICS.

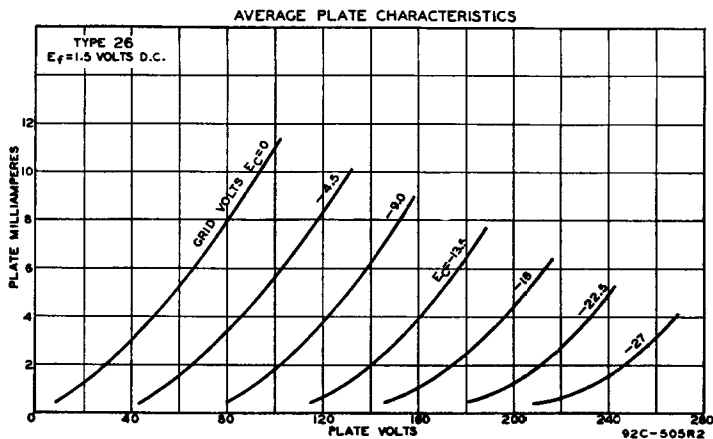



<b>page</b>	<b>26 sheet</b>	<b>date</b>
1	111	1937
2	FP	1999.10.10