


T.	Image	Diagram	$U_f$	$I_f$	$U_a$	$U_g$	$I_a$	$S$	$R_i$	$\mu$	$U_f/k$	$I_k$	$P_a$
			V	A	V	V	mA	mA/V	k $\Omega$	V/V	V	mA	W
ECC 35	Mul	I	6,3	0,4	250 300	-2,5	2,3	2 maximum	34	68	90	8	1,5
6 SL 7	int	I	6,3	0,3									
7 F 7	amer	2	6,3	0,3	250 300	-2	2,3 maximum	1,6	44	70	90	10	1
12 SL 7-GT	int	I	12,6	0,15									
14 F 7	amer	2	12,6	0,15									
5691 <sup>1)</sup>	amer	I	6,3	0,6									
5755 <sup>2)</sup>	amer	3	6,3/12,6	0,36/0,18									














1) vide \*4,a,b,c = 10.000, f,g;  $U_f = 6,3 \text{ V} \pm 5\%$   
 2) vide \*4,a,f;  $U_f = 6,3/12,6 \text{ V} \pm 10\%$   
 3) vide \*4,a,b,c = 10.000, f,g;  $U_f = 6,3 \text{ V} \pm 10\%$

T.	Diagram	$C_g$	$C_a$	$C_{g/a}$	$C_{g/g}$	$C_{a/a}$	$C_{aI/gII}$
		pF	pF	pF	pF	pF	pF
ECC 35	I sect. II sect.	3	1				
		3	1,3	3		0,75	
6 SL 7	I = II sect.	1,5	2	1,5	0,03	0,4	0,01
6 SL 7-GT	I sect.	2,5	0,6	2,85			
	II sect.	2,2	0,75	2,9	0,2	0,3	0,12
7 F 7	I=II sect.	2,4	2	1,6	0,2	1	

Equivalents

CK 5755 <sup>3)</sup>	Ray = 5755	6 SU 7-GTY	amer = 6 SL 7
6 H 9 C	CCCP = 6 SL 7	6 SU 7-WGT <sup>3)</sup>	amer = 6 SL 7
6 H 9 M	CCCP = 6 SL 7	7 F 7-TV	Syl = 7 F 7
6 SL 7-GT	int = 6 SL 7	420 A <sup>3)</sup>	WE = 5755
6 SL 7-GTY	Syl = 6 SL 7	6113	amer = 6 SL 7
6 SL 7-WA <sup>3)</sup>	amer = 6 SL 7	6188 <sup>3)</sup>	amer = 6 SL 7
6 SL 7-WGT <sup>3)</sup>	amer = 6 SL 7		

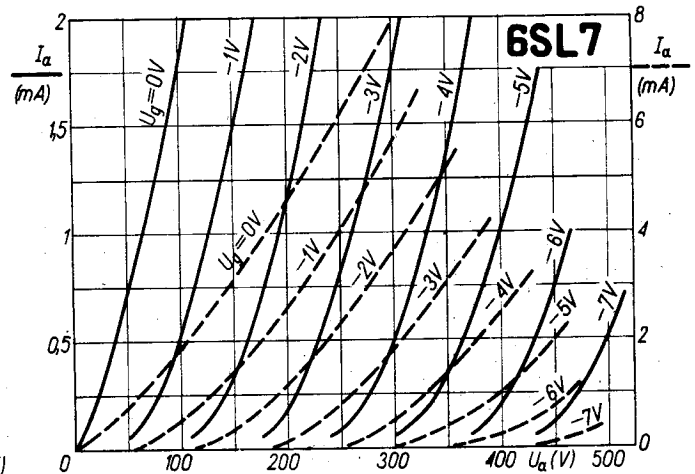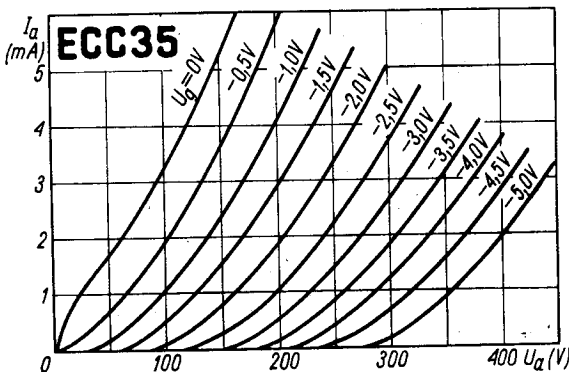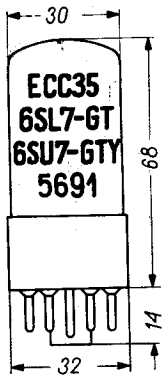

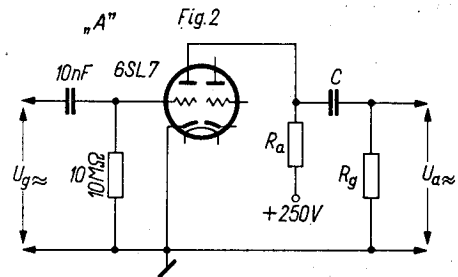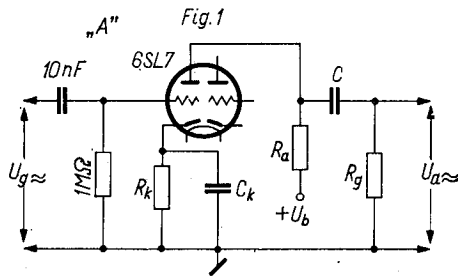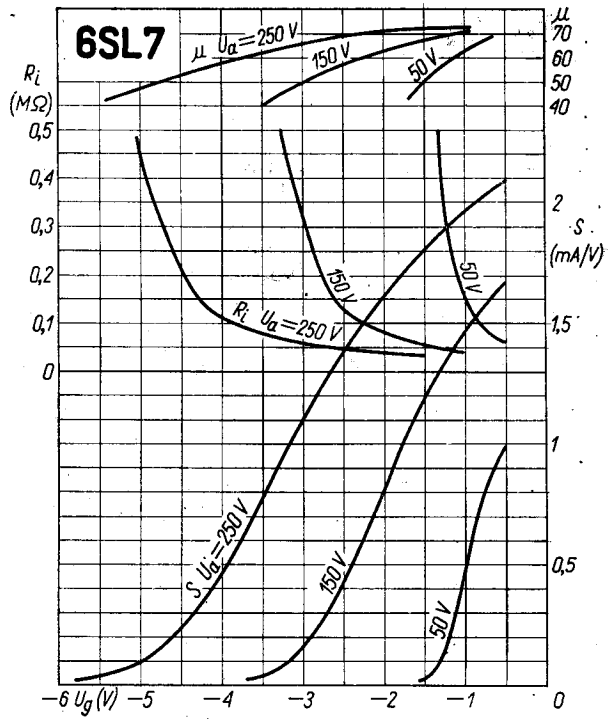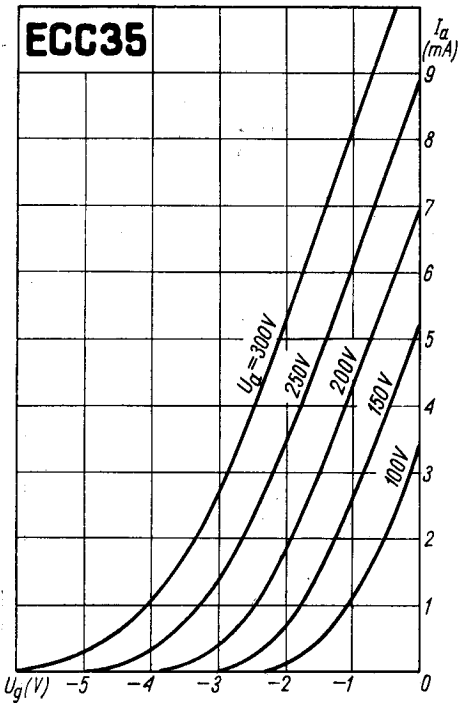


6 SL 7 (Fig. 1)

$U_b$ V	$R_a$ MΩ	$R_g$ MΩ	$R_k$ kΩ	$C_k$ μF	$C$ nF	$U_{a\approx}$ V	$\mu$ V/V
90	0,1	0,47	4,8	2	6,5	9,1	30
90	0,22	1	9,1	1,1	3,5	12	37
90	0,47	2,2	15	0,6	2	16	41
180	0,1	0,47	2,5	2,8	6,5	32	37
180	0,22	1	4,6	1,5	3,5	38	44
180	0,47	2,2	9,1	0,8	2	43	47
300	0,1	0,47	2,1	3	6,5	63	41
300	0,22	1	3,7	1,6	3,5	77	48
300	0,47	2,2	7,2	0,9	2	85	51

6 SL 7 (Fig. 2)

$R_a$ MΩ	$R_g$ MΩ	$C$ nF	$U_{a\approx}$ V	$\mu$ V/V
0,1	0,25	25	29	51
0,25	0,5	10	35	67

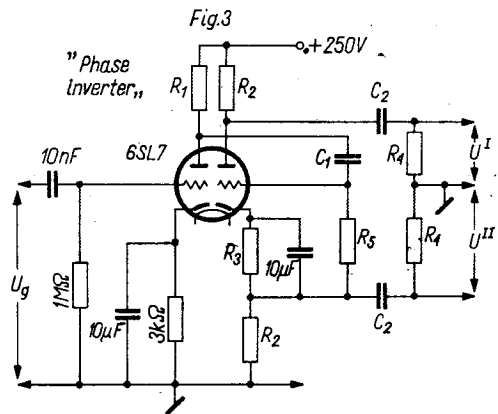

6 SL 7 (Fig. 3)

$R_1$ kΩ	$R_2$ kΩ	$R_3$ kΩ	$R_4$ kΩ	$R_5$ MΩ	$C_1$ nF	$C_2$ nF	$U_{a\approx}$ V	$\mu$ V/V
100	50	1	125	25	50	21	21	60
250	125	3	250	0,5	10	25	23	64