



High-vacuum HALF-WAVE RECTIFIER
 REDRESSEUR MONOPLAQUE à vide poussé
 Hochvakuum EINWEGGLEICHRICHTER

Heating : indirect by A.C.
 parallel supply
 Chauffage: indirect par C.A.
 alimentation-parallèle
 Heizung : indirekt durch Wechsel-
 strom; Parallelspeisung

$V_f = 6,3 \text{ V}$

$I_f = 0,42 \text{ A}$

Dimensions in mm
 Dimensions en mm
 Abmessungen in mm



Base, culot, Sockel: Miniature

Operating characteristics
 Caractéristiques d'utilisation
 Betriebsdaten

V_i (V_{eff})	C_{filt} (μF)	R_t (Ω)
250	32	min. 100
	16	min. 50
	8	0
200	32	min. 70
	16	min. 30
	8	0


Limiting values
 Caractéristiques limites
 Grenzdaten

$V_i = \text{max. } 250 \text{ } V_{eff}$

$I_o = \text{max. } 75 \text{ mA}$

$C_{filt} = \text{max. } 32 \text{ } \mu F$

$V_{kf} = \text{max. } 300 \text{ V}$

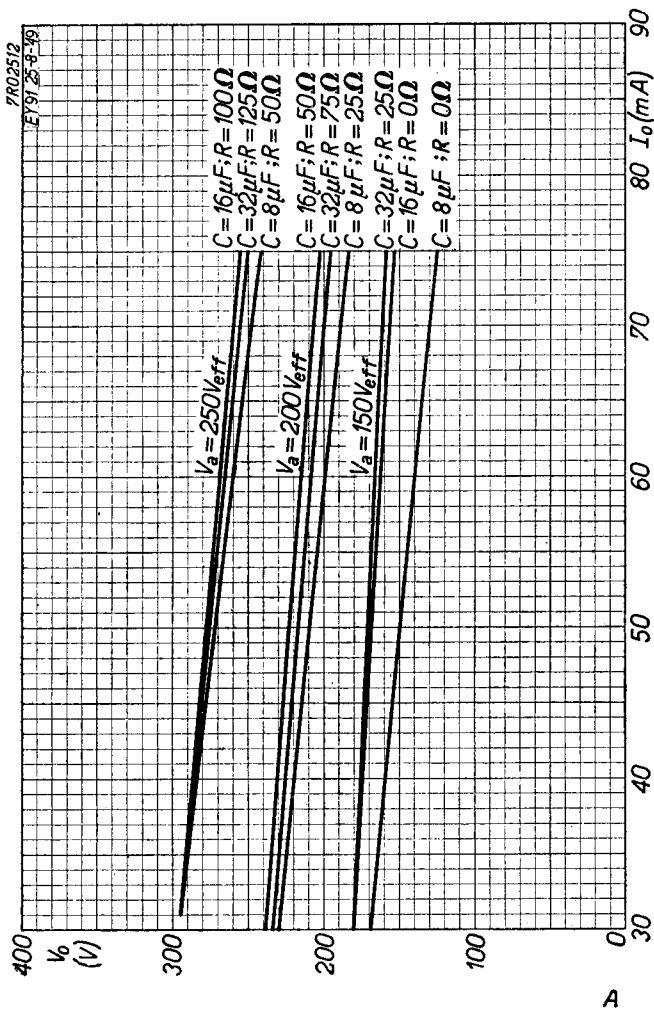

PHILIPS



*Electronic
Tube*

HANDBOOK

page	EY91 sheet	date
1	1	1953.11.11
2	A	1953.11.11
3	FP	1999.07.10