
Not for new designs

Vishay Roederstein

Metallized Polycarbonate Film Capacitor
Related Document: IEC 60384-6

Dimensions in millimeters

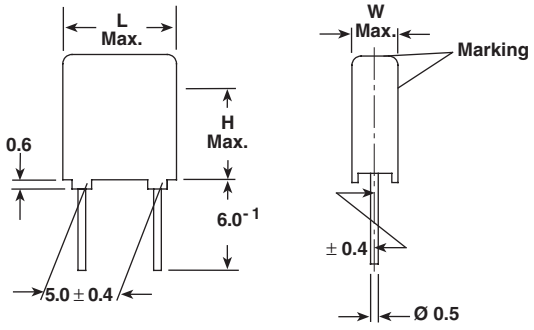

MAIN APPLICATIONS
High frequency coupling and decoupling for fast digital and analog IC's; filter, timing and integrating circuits.

MARKING
Manufacturer's logo/type/C-value/rated voltage/tolerance/ date of manufacture

DIELECTRIC
Polycarbonate film

ELECTRODES
Vacuum deposited aluminum

COATING
Flame retardant plastic case (UL-class 94 V-0) red, epoxy resin sealed

CONSTRUCTION
Extended metallized film (refer to general information)

LEADS
Tinned wire

IEC TEST CLASSIFICATION
55/100/21, according to IEC 60068

OPERATING TEMPERATURE RANGE
- 55°C to + 100°C

FEATURES
Product is completely lead (Pb)-free.
Product is RoHS compliant.

Pb-free

e3

RoHS COMPLIANT

CAPACITANCE RANGE
0.01µF to 0.33µF

CAPACITANCE TOLERANCES
± 20% (M), ± 10% (K), ± 5% (J)

RATED VOLTAGES (U_R)
63 VDC, 100 VDC

PERMISSIBLE AC VOLTAGES (RMS) UP TO 60HZ
40 VAC, 63 VAC

TEST VOLTAGE (ELECTRODE/ELECTRODE)
1.6 x U_R for 2 s

INSULATION RESISTANCE
Measured at 100 VDC (63 VDC series measured at 50 VDC) after one minute
3750 MΩ minimum value (50,000 MΩ typical value)

CAPACITANCE DRIFT
Up to + 40°C, ± 1% for a period of two years

DERATING FOR DC AND AC.CATEGORY VOLTAGE U_C
At + 85°C: $U_C = 1.0\ U_R$
At + 100°C: $U_C = 0.8\ U_R$

SELF INDUCTANCE
~ 6 nH measured with 2mm long leads

PULL TEST ON LEADS
≥ 30 N in direction of leads according to IEC 60068-2-21

RELIABILITY
Operational life > 300,000 h
Failure rate < 1 FIT (40°C and 0.5 x U_R)

For further details, please refer to the general information available at www.vishay.com/doc?26033.

MAXIMUM PULSE RISE TIME

PCM (mm)	Maximum Pulse Rise Time d_v/d_t [V/µs]	
	63 VDC	100 VDC
5	17	24

If the maximum pulse voltage is less than the rated voltage higher dv/dt values can be permitted.

DISSIPATION FACTOR TAN δ

MEASURED AT	C ≤ 0.1µF	0.1µF < C ≤ 1.0µF
1kHz	3×10^{-3}	3×10^{-3}
10kHz	4×10^{-3}	4×10^{-3}
100kHz	10×10^{-3}	—
	Maximum values	


CAPACITANCE	CAPACITANCE CODE	VOLTAGE CODE 06 63 VDC/ 40 VAC			VOLTAGE CODE 01 100 VDC/ 63 VAC		
		W	H	L	W	H	L
0.01µF	- 310	—	—	—	2.5	6.0	7.5
0.015µF	- 315	—	—	—	2.5	6.0	7.5
0.022µF	- 322	—	—	—	2.5	6.0	7.5
0.033µF	- 333	—	—	—	2.5	6.0	7.5
0.047µF	- 347	2.5	6.0	7.5	—	—	—
0.068µF	- 368	2.5	6.0	7.5	—	—	—
0.10µF	- 410	3.5	8.5	7.5	—	—	—
0.15µF	- 415	3.5	8.5	7.5	—	—	—
0.22µF	- 422	4.5	9.5	7.5	—	—	—
0.33µF	- 433	5.0	10.0	7.5	—	—	—

Further C-values upon request


RECOMMENDED PACKAGING

LETTER CODE	TYPE OF PACKAGING	HEIGHT (H) (mm)	REEL DIAMETER (mm)	ORDERING CODE EXAMPLE	PCM 5
D	AMMO	16.5	S*	MKC 1858-433-065-D	X
G	AMMO	18.5	S*	MKC 1858-433-065-G	X
F	REEL	16.5	350	MKC 1858-433-065-F	X
W	REEL	18.5	350	MKC 1858-433-065-W	X
—	BULK	—	—	MKC 1858-433-065	X

*S = box size 55 x 210 x 340mm (W x H x L)

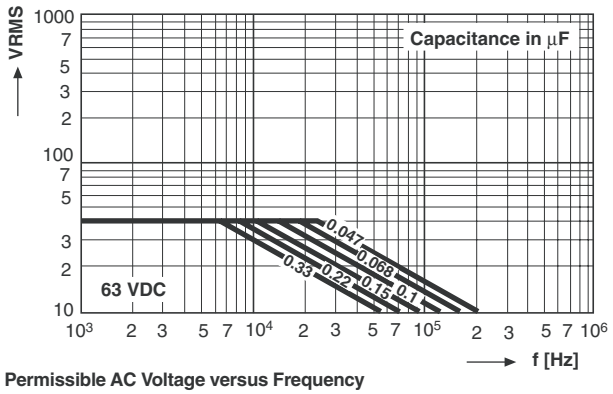

Permissible AC Voltage versus Frequency

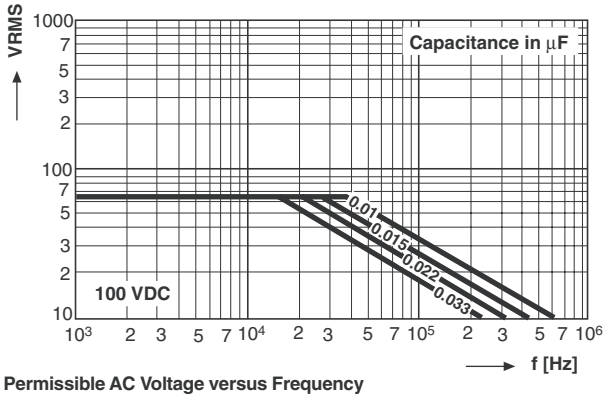

Permissible AC Voltage versus Frequency

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

MKC1858333014 MKC1858410064 MKC1858347064 MKC1858310014 632P475X9050