


High vacuum HALF WAVE RECTIFIER
 REDRESSEUR MONOPLAQUE à vide poussé
 Hochvakuum EINWEGGLEICHRICHTER

Heating : direct by A.C.
 Chauffage: direct par C.A.
 Heizung : direkt durch Wechselstrom

$V_f = 4 \text{ V}$
 $I_f = 1,3 \text{ A}$

Dimensions in mm
 Dimensions en mm
 Abmessungen in mm




Operating conditions and limiting values
 Caractéristiques d'utilisation et limites
 Betriebs- und Grenzdaten


$V_{tr} =$	700	max. 800	V_{eff}
$I_o =$	max. 120	max. 100	mA
$H_t =$	min. 200		Ω
$C =$	max. 12		μF

1832

"Miniwatt"

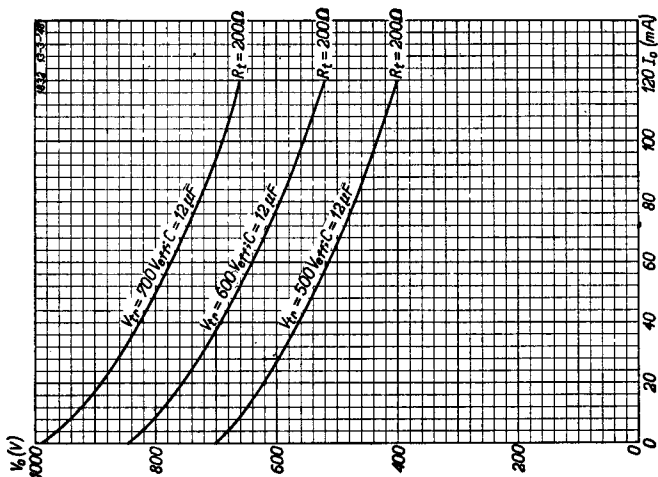

55922

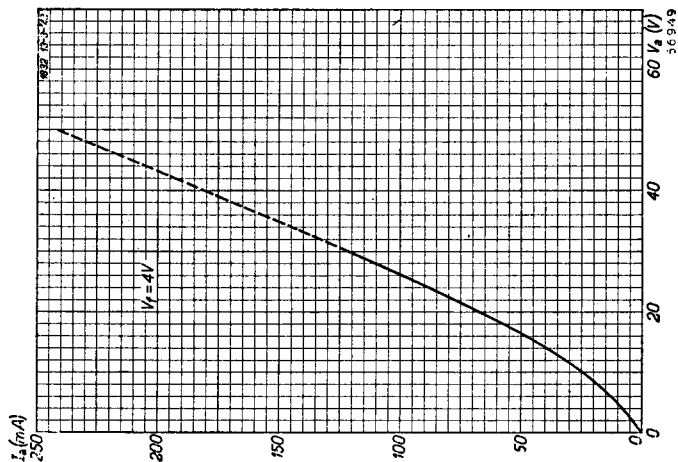

56949

PHILIPS



*Electronic
Tube*

HANDBOOK

	1832	
page	sheet	date
1	1	1948.08.26
2	2	1948.08.26
3	FP	1999.09.05