



TUNG-SOL

DUO-DIODE TRIODE



METAL SHELL

UNIPOTENTIAL CATHODE
 HEATER
 12.6 VOLTS 0.15 AMPERE
 AC OR DC
 ANY MOUNTING POSITION



BOTTOM VIEW
 SMALL WAFER
 8 PIN OCTAL

THE 12SW7 HAS TWO DIODES AND A MEDIUM-MU TRIODE IN ONE ENVELOPE. IT IS DESIGNED ESPECIALLY FOR USE IN EQUIPMENT WHERE THE OPERATING VOLTAGES ARE OBTAINED FROM A 12 CELL STORAGE BATTERY AND FOR OPERATION AT A PLATE-SUPPLY VOLTAGE HAVING A DESIGN CENTER OF 26.6 VOLTS. IT MAY BE USED FOR SERVICE AS A DIODE DETECTOR, AVC RECTIFIER AND AS AN AUDIO AMPLIFIER IN AC, STORAGE BATTERY AND AC-DC OPERATED RECEIVERS.

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD MB-210

HEATER VOLTAGE	12.6	VOLTS
HEATER CURRENT	0.15	AMP.
PLATE VOLTAGE	250	VOLTS
PLATE DISSIPATION	2.5	WATTS
PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEG. WITH RESPECT TO CATHODE	90	VOLTS
HEATER POS. WITH RESPECT TO CATHODE	90	VOLTS

DIRECT INTERELECTRODE CAPACITANCES - TRIODE UNIT

WITH SHELL CONNECTED TO CATHODE

GRID TO PLATE (APPROX.)	2.4	μuf
INPUT (APPROX.)	3.0	μuf
OUTPUT (APPROX.)	2.8	μuf

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER

PLATE VOLTAGE	26.5	250	VOLTS
GRID VOLTAGE:			
USING FIXED SUPPLY	---	-9	VOLTS
USING GRID RESISTOR	2	---	MEG OHMS
PLATE CURRENT	1.1	9.5	MA.
PLATE RESISTANCE	15 500	8 500	OHMS
TRANSCONDUCTANCE	1 100	1 900	μMHOS
AMPLIFICATION FACTOR	17	16	

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

RESISTANCE-COUPLED AMPLIFIER

PLATE SUPPLY VOLTAGE ^A	90	180	300	VOLTS
LOAD RESISTANCE	0.1	0.1	0.1	MEGOHM
GRID RESISTOR	0.25	0.25	0.25	MEGOHMS
CATHODE RESISTOR	4 400	4 100	3 800	OHMS
CATHODE BY-PASS CONDENSER	0.9	0.9	1.1	μf
BLOCKING CONDENSER	0.01	0.01	0.015	μf
PEAK VOLTAGE OUTPUT ^B	19	43	68	VOLTS
VOLTAGE GAIN (AT 5.0 VOLTS RMS)	10	10	10	

^A VOLTAGE AT PLATE EQUALS PLATE SUPPLY VOLTAGE MINUS VOLTAGE DROP IN LOAD RESISTANCE AND CATHODE RESISTOR.

^B VOLTAGE ACROSS GRID RESISTOR AT GRID-CURRENT POINT.

SIMILAR TYPE REFERENCE: Except for heater ratings, same ratings and characteristics as 6R7, 6R7G, 6R7Gt, 6SR7, 6SR7Gt, 28CA. Same ratings and characteristics as 12SR7Gt.



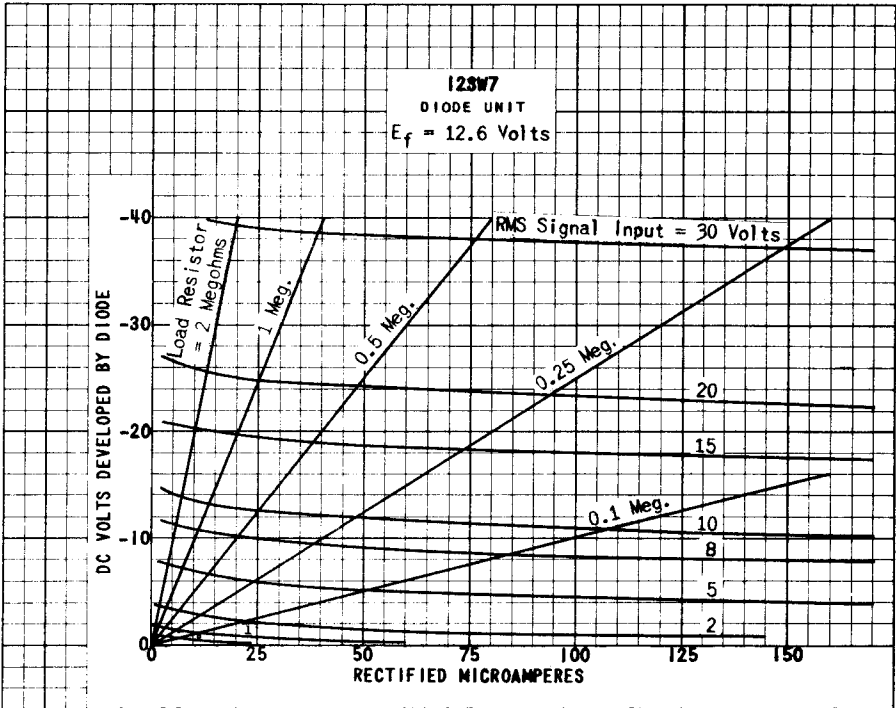


PLATE
1752
NOV. 1,
1946

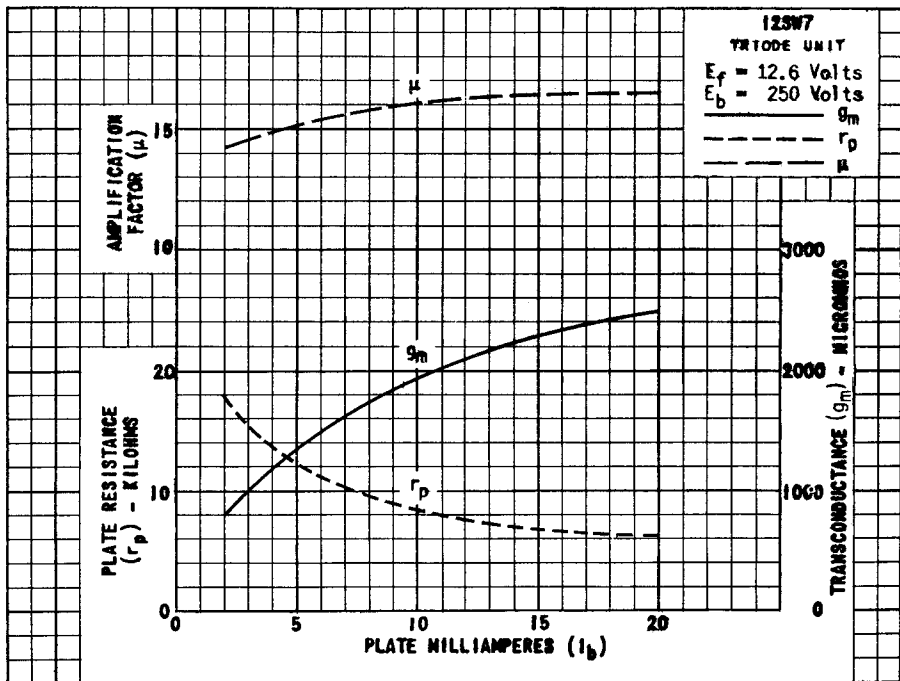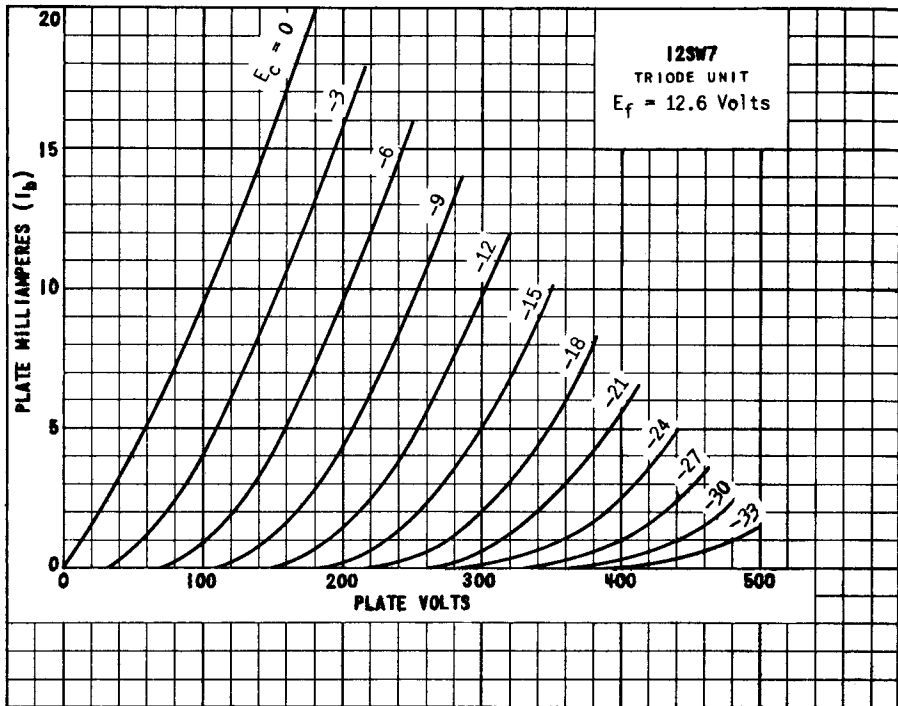

PRINTED IN U. S. A.

PLATE
1753
NOV. 1,
1946