


Current Equipment Type

TYPE 5Z4G  
(OCTAL BASE)  
FULL-WAVE RECTIFIER



The BRIMAR type 5Z4G is an indirectly heated full-wave rectifier for A.C. mains operation.

RATINGS

Heater Voltage ... ..	5.0 volts
Heater Current... ..	2.0 amp.
Peak Inverse Voltage ... ..	1,400 volts max.
Peak Current (each Anode) ... ..	375 mA max.


CHARACTERISTICS AS FULL-WAVE RECTIFIER

CONDENSER INPUT

R.M.S. Input per Anode ... ..	350 volts max.
Supply Impedance per Anode... ..	30 ohms min.
Rectified Current ... ..	125 mA max.
Reservoir Condenser ... ..	32 $\mu$ F max.

CHOKE INPUT

R.M.S. Input per Anode ... ..	500 volts max.
Input Choke Inductance ... ..	5 Henries min.
Rectified Current ... ..	125 mA max.

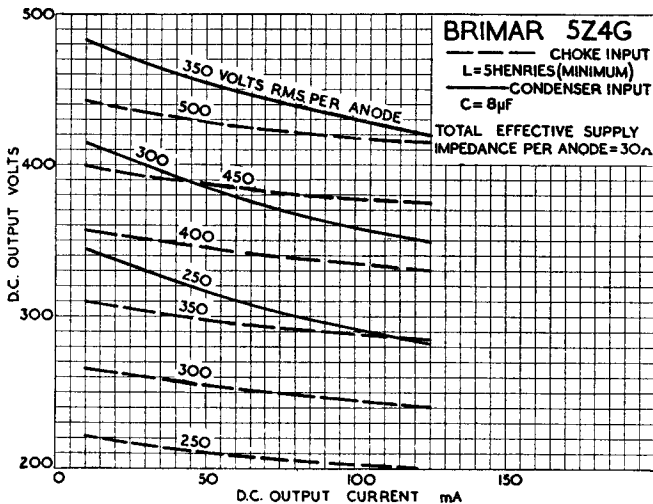

CD15