
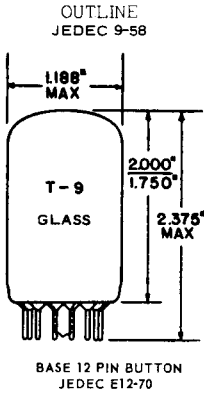


## TUNG-SOL

DUAL PENTODE  
COMPACTRON

FOR  
FM DETECTOR  
AND AUDIO OUTPUT  
IN T.V. RECEIVERS



COATED UNIPOTENTIAL CATHODE  
ANY MOUNTING POSITION

THE TUNG-SOL 6BF11 IS A 12-PIN T-9 COMPACTRON CONTAINING TWO DISSIMILAR PENTODES. SECTION 1 IS A POWER PENTODE FOR AUDIO APPLICATION. SECTION 2 IS A DUAL CONTROL PENTODE INTENDED FOR USE AS FM DETECTOR IN TV CIRCUITS. ELECTRICALLY, SECTION 2 IS SIMILAR TO TYPE 6DT6. EXCEPT FOR HEATER CHARACTERISTICS, THE 6BF11 IS IDENTICAL TO THE 17BF11.

DIRECT INTERELECTRODE CAPACITANCES  
WITHOUT EXTERNAL SHIELD

PENTODE 1 - GRID 1 TO PLATE	0.24	pf
INPUT: (G <sub>1</sub> TO H + K + I.S. + G <sub>2</sub> )	13	pf
OUTPUT: (P TO H + K + I.S. + G <sub>2</sub> )	10	pf
PENTODE 2 - GRID 1 TO PLATE	0.036	pf
GRID 1 TO ALL (G <sub>1</sub> TO H + K + I.S. + G <sub>2</sub> + G <sub>3</sub> + P)	6.5	pf
GRID 3 TO PLATE	3.2	pf
GRID 3 TO ALL (G <sub>3</sub> TO H + K + I.S. + G <sub>1</sub> + G <sub>2</sub> + P)	8.0	pf
GRID 1 TO GRID 3	0.11	pf
COUPLING - PLATE TO PLATE	0.13	pf

HEATER CHARACTERISTICS AND RATINGS  
DESIGN MAXIMUM SYSTEM - SEE EIA STANDARD RS-239

AVERAGE CHARACTERISTICS	6.3 VOLTS	1.2	AMPS.
LIMITS OF APPLIED VOLTAGE - AC OR DC		6.3 ± 0.6	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE-BOTH SECTIONS			
HEATER NEGATIVE WITH RESPECT TO CATHODE			
TOTAL DC AND PEAK		200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE			
DC		100	VOLTS
TOTAL DC AND PEAK		200	VOLTS

CONTINUED ON FOLLOWING PAGE

## TUNG-SOL

CONTINUED FROM PRECEDING PAGE

## MAXIMUM RATINGS

DESIGN MAXIMUM SYSTEM - SEE EIA STANDARD RS-239


	SECTION 1	SECTION 2	
PLATE VOLTAGE	165	330	VOLTS
GRID 2 VOLTAGE	150	-	VOLTS
GRID 2 SUPPLY VOLTAGE	-	330	VOLTS
POSITIVE DC GRID 3 VOLTAGE	-	28	VOLTS
PLATE DISSIPATION	6.5	1.7	WATTS
GRID 2 DISSIPATION	1.8	SEE CHART	WATTS
CATHODE CURRENT	65	1.1	MA
GRID 1 CIRCUIT RESISTANCE			
FIXED BIAS	0.25	-	MEGOHMS
SELF BIAS	0.5	-	MEGOHMS

## AVERAGE CHARACTERISTICS

	SECTION 1	SECTION 2	
PLATE VOLTAGE	145	150	VOLTS
GRID 2 VOLTAGE	110	100	VOLTS
GRID 3 VOLTAGE	-	0	VOLTS
GRID 1 VOLTAGE	-6.0	0	VOLTS
CATHODE RESISTOR	-	560	OHMS
PLATE CURRENT	36	1.3	MA
GRID 2 CURRENT	3.0	2.0	MA
TRANSCONDUCTANCE GRID 1 TO PLATE	8,600	1,000	$\mu$ MHOS
GRID 3 TO PLATE	-	400	$\mu$ MHOS
PLATE RESISTANCE - APPROX.	0.03	0.15	MEGOHMS
GRID 1 VOLTAGE FOR $I_b = 10 \mu A$	-	-4.5	VOLTS
GRID 3 VOLTAGE FOR $I_b = 10 \mu A$	-	-4.5	VOLTS

## TYPICAL OPERATION - CLASS A1 POWER AMPLIFIER

	SECTION 1	
PLATE VOLTAGE	145	VOLTS
GRID 2 VOLTAGE	110	VOLTS
GRID 1 VOLTAGE	-6.0	VOLTS
PEAK AUDIO GRID 3 VOLTAGE	6.0	VOLTS
LOAD RESISTANCE	3,000	OHMS
MAXIMUM SIGNAL PLATE CURRENT	40	MA
MAXIMUM SIGNAL GRID 2 CURRENT	9.0	MA
TOTAL HARMONIC DISTORTION	10	%
POWER OUTPUT	2.4	WATTS

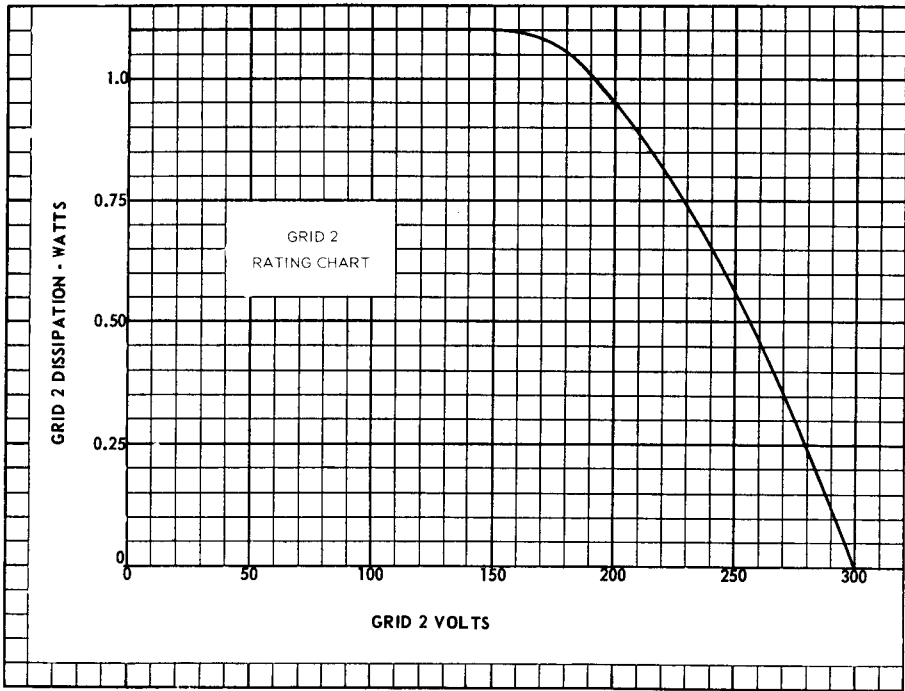

PRINTED IN U. S. A.