

MINIATURE ULTRA SHORT WAVE TRIODE

EC53

Miniature triode for use as low power oscillator
at frequencies up to 600 Mc/s.

HEATER

V_h	6.3	V
I_h	0.25	A

CAPACITANCES

c_{in}	1.3	$\mu\mu F$
c_{out}	0.13	$\mu\mu F$
c_{a-g}	1.3	$\mu\mu F$

CHARACTERISTICS

V_a	200	V
V_g	-3.3	V
I_a	7.5	mA
g_m	2.9	mA/V
μ	33	
r_a	11,400	Ω
$g_m (V_g=0)$	4.0	mA/V

OPERATING CONDITIONS AS POWER OSCILLATOR UP TO 400 Mc/s

f Mc/s	V_a V	I_a mA	I_g mA	W_{out} W	η %	Refer to circuit
110	250	14.5	5	1.3	35	A
165	250	14.5	5	1.2	33	
210	250	12.5	3.6	0.8	26	
295	250	12.5	3.6	0.5	16	B
335	200	12.5	3.6	0.35	14	
400	200	12.5	3.6	0.3	12	

NOTE: The input power is reduced at the higher frequencies in order to keep within the rated maximum anode dissipation.

LIMITING VALUES

V_a max.	250	V
W_a max.	2.5	W
I_k max.	20	mA
V_g max. ($I_{g1}=+0.3\mu A$)	-1.5	V
R_g max.	0.5	M Ω
V_{h-k}	40.0	V
R_{h-k}	20,000	Ω
Max. operating frequency	600	Mc/s




EC53


MINIATURE ULTRA SHORT WAVE TRIODE

*Miniature triode for use as low power oscillator
at frequencies up to 600 M.c/s.*

ARRANGEMENT OF ELECTRODES
AND BASE CONNECTIONS.

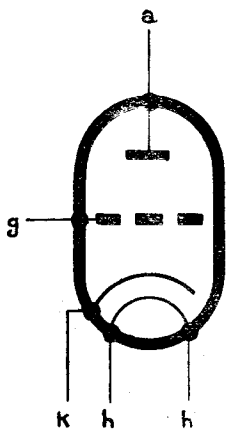



DIMENSIONS

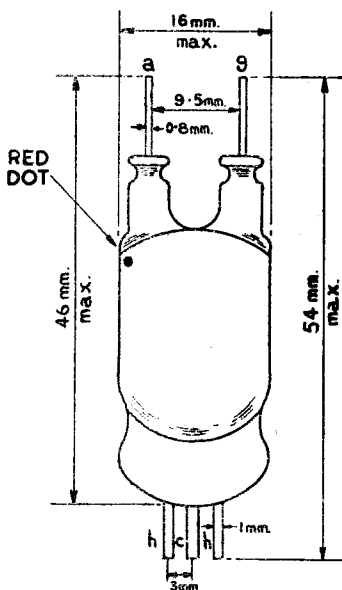

MINIATURE ULTRA SHORT WAVE TRIODE

EC53

Miniature triode for use as low power oscillator
at frequencies up to 600 Mc/s.

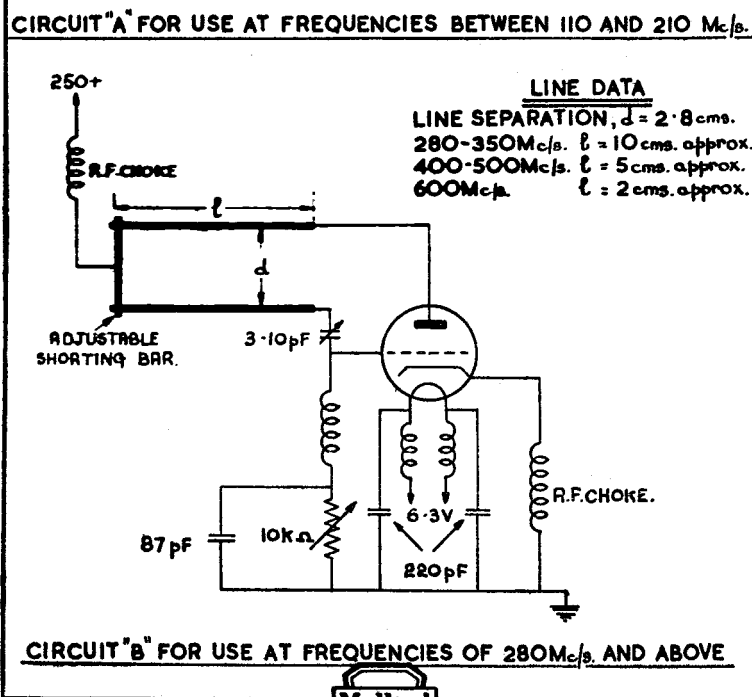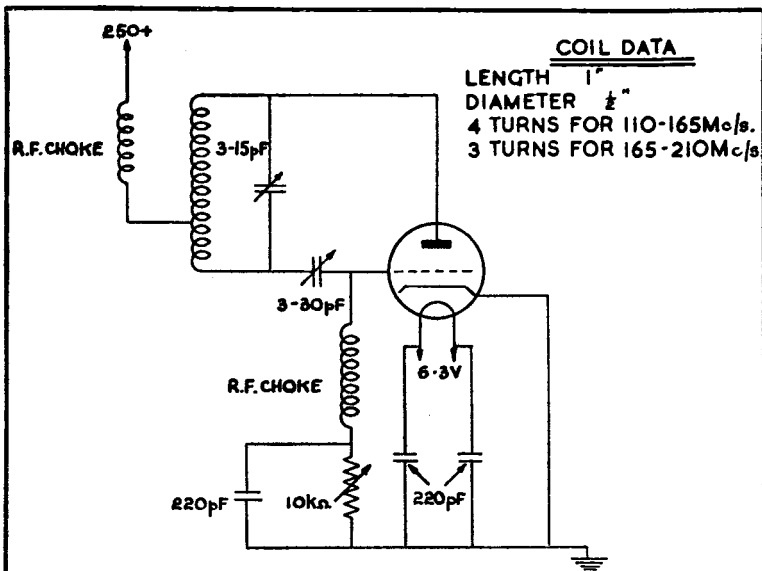

EC53

MINIATURE ULTRA SHORT WAVE TRIODE

*Miniature triode for use as low power oscillator
at frequencies up to 600 M.c.s.*

