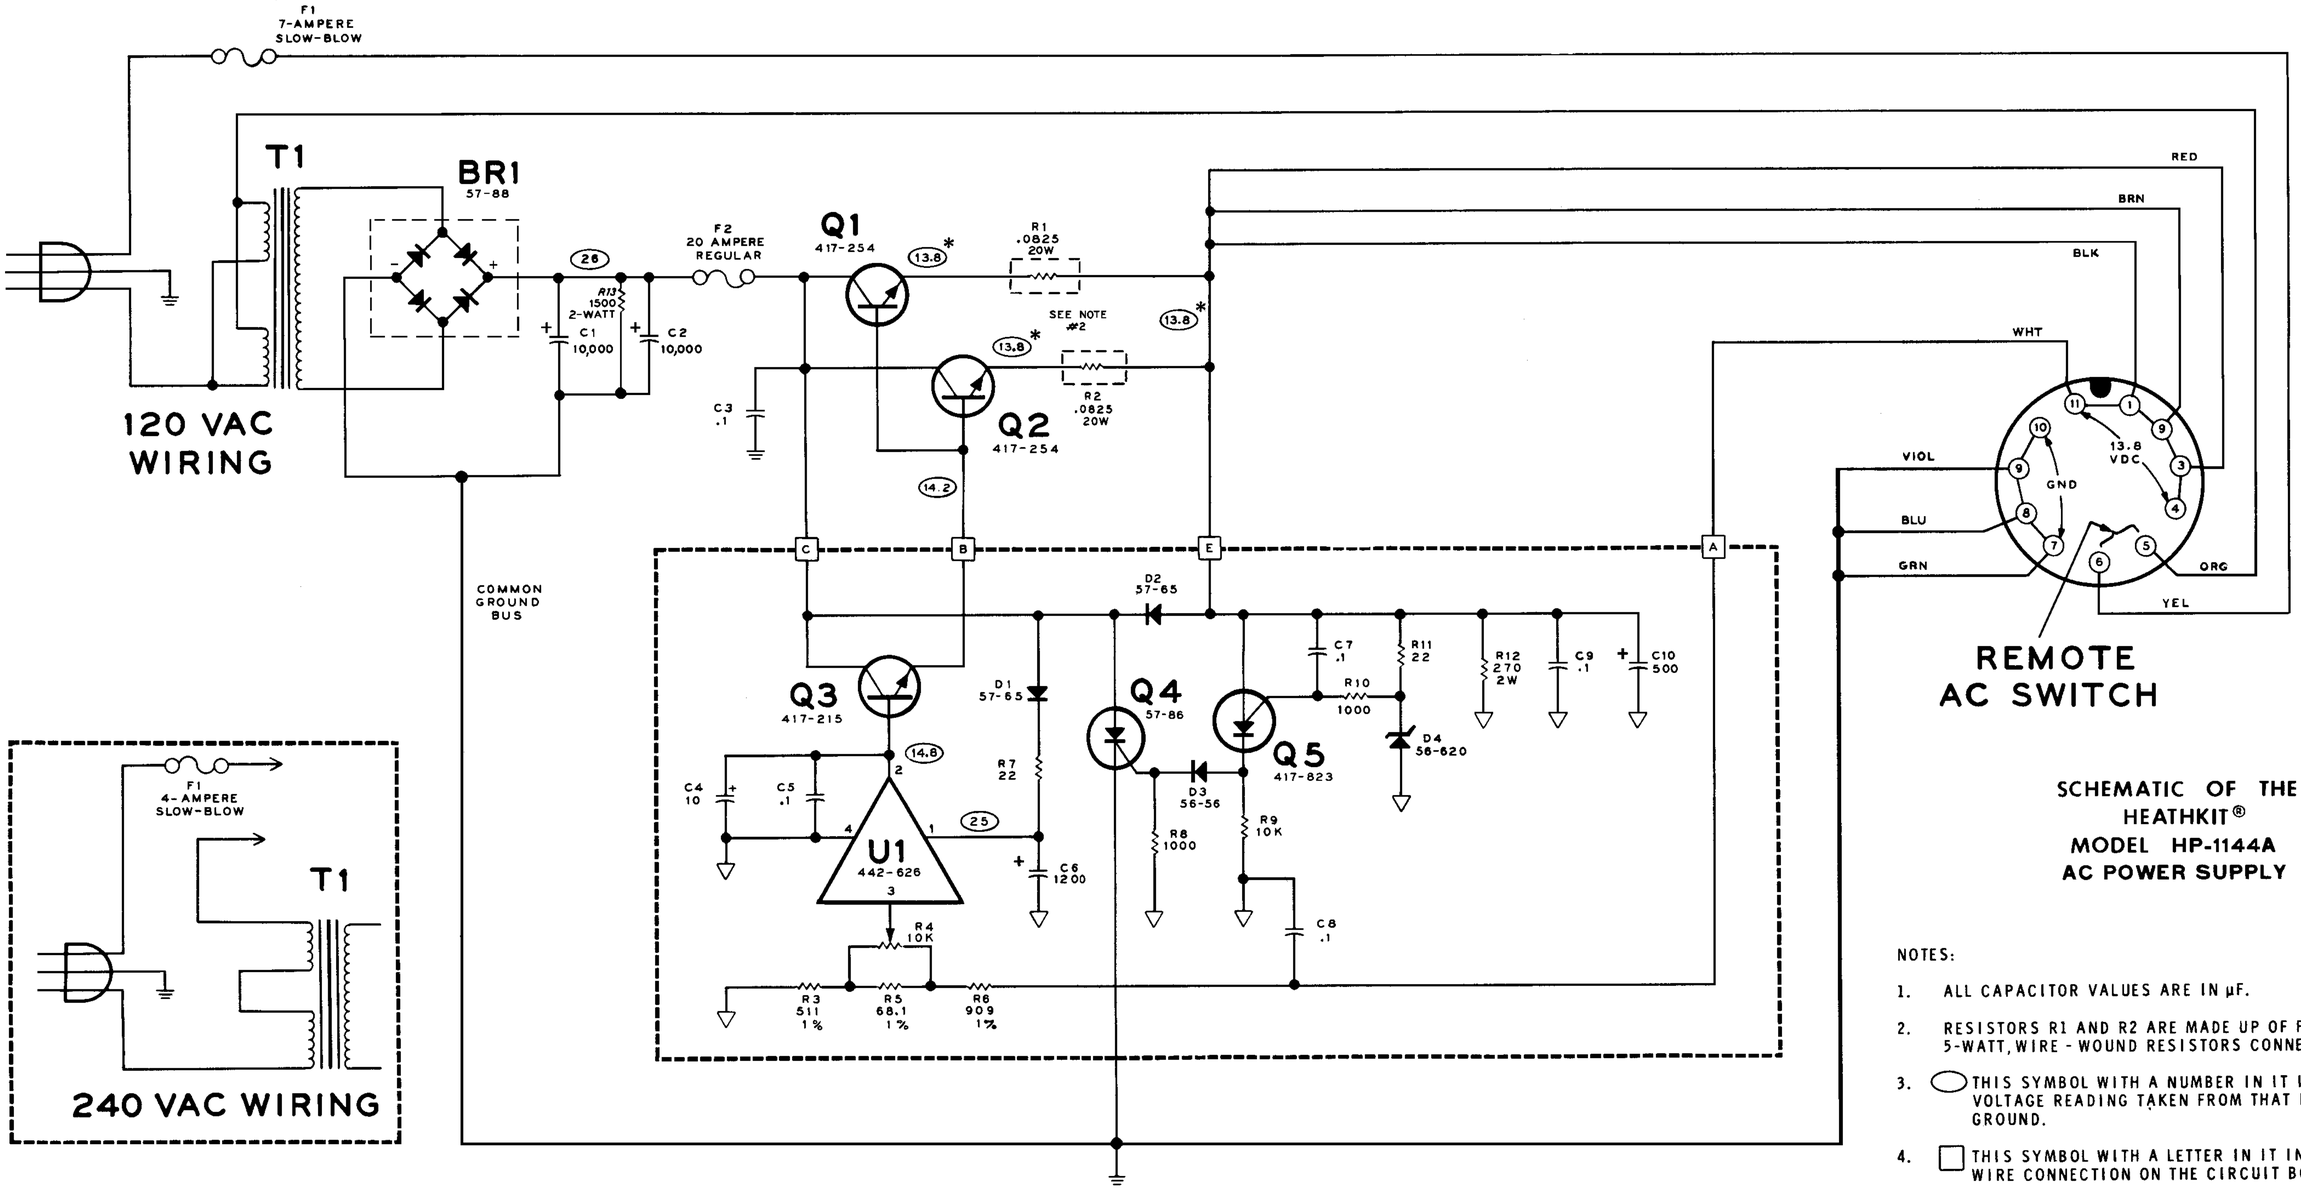

SCHEMATIC OF THE
HEATHKIT®
MODEL HP-1144A
AC POWER SUPPLY

NOTES:

1. ALL CAPACITOR VALUES ARE IN μF.
2. RESISTORS R1 AND R2 ARE MADE UP OF FOUR .33Ω, 5-WATT, WIRE - WOUND RESISTORS CONNECTED IN PARALLEL.
3. ⬭ THIS SYMBOL WITH A NUMBER IN IT INDICATES A DC VOLTAGE READING TAKEN FROM THAT POINT TO CHASSIS GROUND.
4. ☐ THIS SYMBOL WITH A LETTER IN IT INDICATES A WIRE CONNECTION ON THE CIRCUIT BOARD.
5. * VOLTAGE ADJUSTABLE