



9006

9006

U-H-F DIODE

MIDGET TYPE

Heater	Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.15	amp.
Direct Interelectrode Capacitances:*		
Plate to Cathode	1.4	μf
Plate to Heater	0.2	μf
Cathode to Heater	2.2	μf
Maximum Overall Length		1-13/16"
Maximum Seated Height		1-9/16"
Length from Base Seat to Bulb Top (excluding tip)		1-3/16 ± 3/32"*
Maximum Diameter		3/4"
Bulb		T-5-1/2
Base [▲]		Miniature Button 7-Pin
Pin 1 - Plate		Pin 5 - Plate
Pin 2 - Cathode		Pin 6 - No Connection
Pin 3 - Heater		Pin 7 - Cathode
Pin 4 - Heater		
RCA Socket		
Mounting Position	BOTTOM VIEW (6BH)	Any

Maximum Ratings Are Design-Center Values

RECTIFIER

Peak Inverse Plate Voltage	750 max. volts
Peak Plate Current	15 max. ma.
D-C Output Current	5 max. ma.
D-C Heater-Cathode Potential	100 max. volts
<i>Typical Operation as Rectifier:</i>	
A-C Plate Supply Voltage (RMS)	270 volts
Min. Total Effective Plate-Supply Impedance	100 ohms
D-C Output Current	5 ma.

With no external shield.

The resonant frequency of the 9006 is 700 megacycles (approx).

[▲] *The center hole in sockets designed for this base provides for the possibility that this tube type may be manufactured with the exhaust-tube tip at the base end. For this reason, it is recommended that in equipment employing this tube type, no material be permitted to obstruct the socket hole.*

*Temporary minimum length = 1-1/16".

OCT. 1, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


DATA

9006



9006

U-H-F DIODE

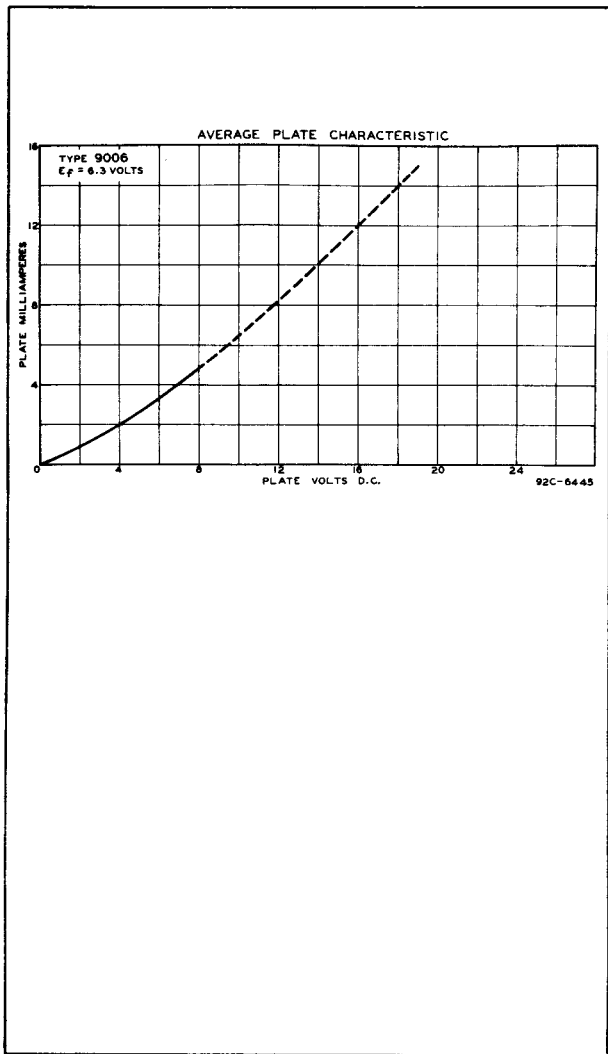

OCT. 1, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-6445